



Specification details were correct at the time of printing. However, product changes may occur after this time. Please check model availability and full specification details with your dealer prior to ordering. We discourage mail order on the grounds of customer fit, set-up and ease of after-sales service. Therefore, only bikes supplied fully assembled directly from an official dealer's premises qualify for any WHYTE warranty in the UK. Customer's statutory rights are not affected.



whyte.bike

W H Y T E
P E R F O R M A N C E B Y D E S I G N



WHYTE 2016





W H Y T E
P E R F O R M A N C E B Y D E S I G N



DESIGNED IN THE UK	PAGES 4-5
WHYTE GEOMETRY	PAGES 6-7
MATERIALS	PAGES 8-9
RACING	PAGES 10-11
QUAD 4 SUSPENSION	PAGES 12-13
SCR	PAGES 14-15
INTERGRIP / GETTA GRIP	PAGES 16-17
G-160 GRAVITY ENDURO	PAGES 18-21
T-130 TRAIL SUSPENSION	PAGES 22-31
TRAIL HARDTAIL	PAGES 32-37
X4 KID'S TRAIL HARDTAIL	PAGES 38-41
X8 PERFORMANCE HARDTAIL	PAGES 42-49
X6 SPORTS HARDTAIL	PAGES 50-55
T-129 XC/TRAIL 29ER	PAGES 56-59
X29 PERFORMANCE HARDTAIL	PAGES 60-63
29-C CARBON PERFORMANCE HARDTAIL	PAGES 64-67
CX CYCLOCROSS	PAGES 68-71
RD7 ROAD DISC	PAGES 72-79
RRD CARBON ROAD DISC	PAGES 80-83
R7 FAST URBAN SERIES	PAGES 84-95
C7 ALL TERRAIN SERIES	PAGES 96-106
C7-e ALL TERRAIN e-BIKE	PAGES 107-109
LIGHTWEIGHT CLASSIC LADIES	PAGES 110-113
WHYTE PARTS AND ACCESSORIES	PAGES 114-115
FRAME GEOMETRY	PAGES 116-121
SPECIFICATIONS	PAGES 122-134



DESIGNED IN THE UK PROVEN WORLDWIDE



Since Whyte began in 1999, our motto has been “performance by design”. Our core R&D team, based in the Cotswolds, live, ride, test and design on the same roads and trails that you ride, and most importantly, in the same conditions - often worse. We know what it’s like to be wet and cold and trying to operate a seat-post quick release with frozen fingers - that’s why you’ll see that ours has a bigger lever than anyone else’s. It’s also why you’ll find Crud-Catcher mounts on our mountain bikes (we’ve spent too many afternoons picking grit out of our eyes after lunchtime rides not to), and it’s why we’ve taken a unique approach to geometry, designed to inspire confidence in all conditions on all different types of terrain.

We don’t just stick to the UK though - our race teams compete on existing and prototype Whyte bikes across the globe, from the gravity enduro circuit to endurance races in Nepal. It’s all valuable feedback that allows us to constantly improve our designs and make Whyte bikes better each year.

Whether we’re riding or perfecting new products in the workshop, we like to push the limits of what’s possible, starting with a clean slate and approaching problems logically, with the aim of creating bikes that we all want to ride and that will make you faster, more confident, and have more fun, whilst requiring as little maintenance as possible. It’s an approach that has won us a string of magazine tests and industry awards, including the prestigious UK Trail Bike of the Year Award in 2013 as well as the Woman’s Hardtail of the Year, Best Trail Hardtail and highest scoring 29er in 2015.

We could go on, but the proof is in the riding - join us at one of our UK-wide demo days to find out for yourself.

WHYTE GEOMETRY MUCH MORE THAN JUST NUMBERS

When we talk about a bicycle's geometry, we're talking about the angles and measurements that determine where the rider is positioned between the wheels, and how the bike connects with the ground. It might sound dull, but it's something we get very excited about at Whyte, and with good reason: more than the components or the frame material, a bike's geometry defines the way it rides. We believe our geometry is the best out there and what sets Whyte apart from the competition in every category. Judging by the reviews, we're right.

The Whyte formula has been 16 years in the making: it's a formula that inspires confidence in beginners and casual cyclists alike, whilst allowing our expert race teams to perform to the absolute limits of their ability. As such, confidence is our ultimate goal when we're designing a bike: whether you're cruising the city's pot-holed streets to get to work or competing at the highest level, we want you to feel secure knowing that you're in charge and not the bike.

We achieve this by combining a relaxed head angle (the angle the front fork comes out of the frame) with a longer than average front centre to create a bike that is stable at speed and feels predictable, especially when the terrain gets steeper. To sharpen up the steering response for low-speed precision we spec wide handlebars and short stems. At the back of the bike, we always aim to make the chainstays as short as physically possible to maximise the bike's agility, making it easier to do everything from popping up kerbs to boosting through the gnarliest trail obstacles.

It's a formula that works in all situations, whatever your ambitions and whatever your level of skill. Simply put, geometry can make or break a bike: with Whyte's unique approach, we've ensured you'll get maximum enjoyment from every ride.



MATERIALS

SELECTED FOR LONGTERM PERFORMANCE

We make frames from aluminium and carbon fibre, both of which are versatile, high performance materials that are equally at home in the the world's largest commercial aeroplanes as they are in the manufacture of bicycles.

Both materials have their own unique properties, and used correctly can create bikes that have lasting character. Through the combination of engineering know-how, great design and the use of the best grades of carbon fibre and aluminium available, we are able to create everything from the super-stiff structures required for a full-suspension bike, to lively yet comfortable hardtail frames.

ALUMINIUM

CUSTOM TUBING FOR A SUPERIOR RIDE

Our selection of premium 6061 grade aluminium is perhaps the ultimate refinement of this frame material. The aluminium we use has been specially developed to allow for hydro-forming (where hot oil is pumped through the tube at pressure to fine-tune its profile) and welding, and our tubes are custom drawn to our own specifications.

That translates into thinner tube butting profiles over the entire length of the tube, and means that for the same strength, stiffness and fatigue characteristics we can engineer a lighter chassis.

Whyte hydro-formed aluminium frame designs concentrate on creating the most efficient shapes for the chassis, whilst retaining an elegant overall design profile. Take our seatstays and chainstays for example: they're internally butted to reduce weight and have extensive shaping and tapering to increase strength and stiffness, whilst generating tyre and mud clearance where it's needed, and offering tangible comfort benefits in use. Very few brands are able to engineer that level of detail and maintain durability: we're proud to be one of the few who go the extra mile.

CARBON FIBRE

TAILORED FOR A PERFECT RIDE

The performance of any carbon fibre component relies on three things: the quality of the raw material, the integrity of the design, and the precision of the assembly. That's why at Whyte we take complete control of the design process then work closely with some of the world's best carbon manufacturers to bring those designs to life.

The closeness of that working relationship allows us to develop our own special combinations of filament grades and resin types to give our carbon frames and components a genuine performance advantage that others can't match, along with reliability you can trust.





WHYTE RACING PROVEN IN COMPETITION

Racing has always been an important part of the Whyte story, but it's unlikely you'll find our riders on the top step of a World Cup podium any time soon. Anyone can throw their jersey on the fastest new athletic wunderkind and watch them win races, but we prefer to do things a little differently. When we recruit athletes we are looking for ambassadors first, racers second: the sort of riders who love riding their bikes, with or without a number board attached to their handlebars, and who are able to give us the most valuable kind of real-world feedback on our prototype designs. That's why you'll see riders like elite XC racer Luke Smith, or ultra endurance hard man Steve Heading riding Whyte bikes: they are intelligent, race winning athletes who ride more than anyone you're likely to have ever met, and who actively work with our engineers to help us perfect our designs.



We support riders and teams across a broad spectrum of disciplines, from XC to Gravity Enduro, via self-supported bike packing events. For the last few years we've even been sponsoring the Lotus F1 Junior team, helping the next generation of Formula One drivers reach the top of their sport.

In mountain biking, the rise of the Gravity Enduro race format has been astounding, and Whyte is leading the charge with one of the best bikes on the circuit in the G-150. This type of racing is widely regarded as the closest thing to what most of us actually do when we ride our mountain bikes - socialise on the climbs, race down the descents - and that is an attitude that informs our bikes across the board. We want our racers to feel confident on their bikes and to fulfil their potential: our geometry helps them do that in every discipline.

In supporting athletes at the top of their respective games, we're able to gather valuable feedback on our bikes which translates directly to you being able to ride further, faster, while having more fun.

What works for our sponsored riders will work for you too.



QUAD 4 SUSPENSION TAKE THE ROUGH WITH THE SMOOTH

When we set out to design bikes around the 29er and 650b wheel sizes, we quickly realised we needed a suspension system that was different to anything we'd produced before. With our design and development squarely focussed on the unique environment that is UK trail riding, we knew weather-proof reliability - a hereditary feature of our Quad-Link systems - was key, and there would be no compromising on frame geometry.

With that in mind, we went back to the drawing board.

It didn't take long to realise that with bigger wheels and full-suspension systems, the suspension kinematics, architectural layout of the frame, and the frame's geometry needed to be designed in unison, with each small change having a knock-on effect elsewhere in the chain. Keeping the rear of the bike as compact and stiff as possible with the same dynamic ride of a 26in bike meant minimising the distance between the rear wheel and bottom bracket centres - a difficult task on a bigger wheeled bike but a cornerstone of the Whyte experience. After much head scratching and late night computer modelling, Quad 4 was born, and it changed the game, with Mountain Biking Australia proclaiming it had "pioneered a new era of progressive genre defining 29er full suspension bikes."

With our latest SCR/SCS bikes taking Quad-4 to the next level, the next new era is already here.





SCR (SINGLE CHAIN RING SPECIFIC) LESS IS MORE

Let's be clear, our Single Chain Ring (SCR) specific system isn't just about the chainring - we've removed the ability to fit a front mech and completely re-engineered the frame - with outstanding results.

By deliberately designing these bikes with a single ring system, we have been able to broaden the main pivot, a significant improvement, as it increases stiffness and bearing life and has meant we can use symmetrical chainstays (SCS), another Whyte innovation that further increases stiffness and better resists the twisting loads that occur under pedalling. On the trail that translates to improved cornering confidence, better suspension performance, greater accuracy and less maintenance.

All the SCR specific bikes use 1 x 11-speed drivetrains which pair a single ring with a wide ratio cassette. In our experience over three years of testing, this set-up provides a sufficiently broad range of gears for experienced riders to comfortably climb most hills in the UK, and the performance advantages - lighter weight and the ability to create a SCR specific frame - are unarguable.

When we released the original T-129 we helped shape the market, creating the shortest chainstays of any production full-suspension 29er, with our SCR specific frames, we're taking things to the next level, all over again.

You'll find SCR specific models across the T129, T-130 and G-160 ranges.



INTERGRIP INTERNAL SEAT POST CLAMP

The invention of reliable dropper seatposts has changed the way we ride - no longer do we find ourselves clumsily wrestling a quick release with frozen fingers at the top of a descent to drop our saddles out of harm's way, a simple push of a button or lever is all that's required.

With their widespread acceptance, it became clear to us that the days of the humble quick release (or even the seatpost collar) were numbered, so we have created Intergrip, our proprietary internal seat post clamping system featured on all our Suspension bikes and selected Hardtail and CX frames. Not only does it look neater, but with no split in the tube to allow for clamping, tolerances can be much tighter and water kept out of the frame for longer, no matter how British the conditions.



GETTA GRIP ADJUSTABLE SEAT POST CLAMP

Getta Grip has been developed from scratch to improve the way a seatpost is held in the frame. Traditional clamps need to bend the frame to grip the seat post and often bind after long periods of use, as the frame can no longer "remember" its original shape.

The Patented Getta Grip system takes a whole new approach using a pad that fits through a window in the frame - ideal for UK conditions as there is no open slot to let in mud and water. Because the Getta Grip seat clamp only has to hold the seatpost rather than bend the frame, less force is required to operate it. The clamping force is spread more evenly making it ideal for carbon posts and has been officially approved by Easton for use with all their seatposts.





G - 1 6 0

GRAVITY ENDURO / TRAIL SUSPENSION 650b

Race proven at the UK Gravity Enduro and Enduro World Series, the G-150 raised the bar for long travel trail bikes. Efficient on the climbs, but point it downhill and it really came alive, the QUAD-4 suspension eating up the technical terrain. For 2016 we have continued to build upon the extensive R&D and radical engineering that went into earlier generation bikes and after a season's racing and testing we've increased the travel, lengthened the geometry and created the G-160. Our Single Chain Ring specific chassis re-defines rear end stiffness. Combine internal routing, our InterGrip seatpost clamping system and durable QUAD-4 linkage, and you have a bike that is faster, stiffer and more capable than ever before.

"Extremely capable and riotous fun to ride." G-150 Works in Enduro Mountainbike Magazine
"An absolute blast to unleash on your local trails." G-150 Works in What Mountain Bike Magazine ★★★★★

G-160 RS
TYPICAL USAGE: GRAVITY ENDURO/TRAIL



RockShox Pike RC fork DebonAir shock and Reverb Stealth seatpost / 29mm wide WTB TCS tubeless ready rims and tyres / SRAM X-1 11-speed drivetrain with SRAM Guide R brakes

GRAVITY ENDURO 650b/27.5"

G-160 WORKS
TYPICAL USAGE: GRAVITY ENDURO/TRAIL



SRAM Rail 40 wheels with tubeless ready Maxxis High Roller II/Minion SS tyres / SRAM XX1/XO drivetrain with SRAM Guide RSC brakes / Oversized RaceFace 35mm X 800mm carbon bars and Easton Haven alloy 32mm long stem

GRAVITY ENDURO 650b/27.5"



T - 1 3 0

TRAIL SUSPENSION 650b

The T-130 is the latest in a long and illustrious line of Whytes that let you go anywhere, ride anything and have maximum fun along the way - the most versatile, one-bike-every-trail, full suspension bike we've ever made.

Boasting 130mm of QUAD-4 suspension, 650b wheels and Whyte's latest groundbreaking trail bike geometry, further evolved for 2016, the T-130 is fast and fun on all the trails you ride - from your front door to the latest generation UK trail centres, or even the Alps.

Whyte's mission has always been to build bikes that benefit riders in the real world, and with the T-130 available in a wider range of sizes in 2016, from extra small to extra large we are able to cater for more riders than ever before.

However you like to ride, in the T-130 you'll discover a bike that's as versatile as a Swiss army knife, and that quickly becomes a trusted companion for a lifetime of adventure, wherever the trail takes you.

"agile, forgiving, playful - and fun" T-130 Works SCR in Australian Mountainbike Magazine

"the best Whyte full-sus to date." T-130 Works SCR in MBR Magazine

T-130 SX
TYPICAL USAGE: TRAIL



Available in XS size for smaller riders / Shimano SLX/XT 2x10spd drivetrain / KS LEV-Integra Dropper Post
T-130 TRAIL SUSPENSION 650b/27.5"



T-130S
TYPICAL USAGE: TRAIL



RockShox Yari RL fork with 35mm stanchions / Monarch DebonAir shock and Reverb Stealth seatpost / SRAM 1 by 11 GX Groupset / Stealth Reverb

T-130 TRAIL SUSPENSION 650b/27.5"

T-130 RS
TYPICAL USAGE: TRAIL



SCR frame with symmetrical chainstays for increased stiffness / Shimano XT 1 by 11 drivetrain / RockShox Pike fork, Monarch DebonAir shock and Reverb Stealth seatpost

T-130 TRAIL SUSPENSION 650b/27.5"

T-130 C RS
TYPICAL USAGE: TRAIL



SCR Carbon/Alloy frame with symmetrical chainstays for increased stiffness / SRAM X-1/X-0 11-speed drivetrain / RockShox Pike Boost fork, Monarch DebonAir shock and Reverb Stealth seatpost

T-130 TRAIL SUSPENSION 650b/27.5"





T-130 C WORKS
TYPICAL USAGE: TRAIL



SCR Carbon/Alloy frame with symmetrical chainstays for increased stiffness / Shimano XT/RaceFace 11-speed drivetrain / Fox Factory 34 fork, Factory DPS rear shock and Reverb Stealth seatpost

T-130 TRAIL SUSPENSION 650b/27.5"



TRAIL HARDTAILS

130MM 650b

In 2015 MBR awarded the 905 a perfect 10 with What Mountain Bike summing it up by saying: "Whichever option you pick from Whyte's new 650b Trail Hardtail range, you're onto a winner." Also, the 905 was the only hardtail featured in the Dirt 100, described as "The Best Trail Hardtail, bar none." Nice, but if our years of development have taught us anything, we knew there was a better bike around the corner.

These bikes were created to do one thing above all else - go bombing on the trail; the ultimate culmination of speed, flow and control. Applying the knowledge gained working with our Enduro race team has lead us to the most progressive geometry yet for 2016, and when applied to our Trail Hardtails, results in our most capable to date.

"an inspiring, near-faultless bike." 901 in What Cycle? ★★★★★

"a massive smile every time you ride." 901 in mbr. Grouptest Winner 10/10

"The best Trail Hardtail bar none." 905 in Dirt 100 2015

"The perfect Trail Hardtail." 905 in mbr magazine 10/10

901
TYPICAL USAGE: TRAIL



Also available in Magenta colour option



Lightweight and stiff 6061 aluminium frame / RockShox Sektor Gold fork / Whyte custom 750mm bar and size specific stem / Maxxis Ardent tyres

TRAIL HARDTAIL 650b/27.5"

905 RS
TYPICAL USAGE: TRAIL



Shimano 2x10 with RockShox Revelation RL fork option also available



SRAM GX, 1x11 RockShox Yari RC fork / Internally routed KS CRUXI Dropper Post / Whyte custom 760mm bar and short gravity stem/ WTB front and rear specific TCS tyres and rims

TRAIL HARDTAIL 650b/27.5"



909
TYPICAL USAGE: TRAIL



Shimano's new 1x11 XT M8000 combined with RaceFace Clinch chaining and BB30 axle / UK-made Hope Evo rear hub / Fox 34 Performance fork with FIT4 Damper
TRAIL HARDTAIL 650b/27.5"



X 4 : K I D ' S T R A I L H A R D T A I L

26" TRAIL

If there's one thing we've learnt over recent years, it's that bigger wheels roll better over obstacles than smaller wheels. It's the same for kids as it is for adults: when you're not getting hooked up on rocks and roots all the time you're more confident, you ride faster and you have more fun. So when we came to design a mountain bike for 9-13 year olds, we took the plunge and went for full-size 26in wheels, rather than the 24in wheels more typical of this category. The result? A boost in performance similar to an adult going from 26 to 29in wheels, with more confidence, more control and easier, safer riding. And thanks to the ubiquity of the 26in format, upgrading is as easy as raiding Mum and Dad's spares cupboard!

405
TYPICAL USAGE: TRAIL



SRAM GX 1 by 11 drivetrain with GX GripShift shifter and/ SR Suntour Epicon fork with adjustable air spring to tune to rider weight / Tailored front and rear tyres to exploit every ounce of grip and performance

KIDS TRAIL 26"





X8 PERFORMANCE HARDTAIL

650b XC/TRAIL

The X8 series of cross country mountain bikes is built around a class leading frame with an award-winning ride. By moving the rear disc brake to the chainstay, we've been able to slim down the seatstays to improve rear end comfort and trail compliance. We've also upped the ante when it comes to UK-specific design tweaks: internal cable and brake hose routing minimises mud build up and keeps your gears working better for longer; Crud Catcher mounts on the downtube keeps mud out of your eyes, and a forward facing seat slot keeps rear wheel spray out of the frame.

Available in standard or compact geometry, for riders with shorter proportions, all models share the same 650b wheels, which combine the fast rolling and terrain flattening abilities of 29er wheel with the agility of the 26in standard.

Whether you're riding with friends in the woods or lining up for a race, the X8 range is sure to deliver.

"Super efficient, lightweight, insatiably rapid short travel race or rave machine"

802 in What Mountain Bike - Grouptest Winner ★★★★★

"the Whyte had us grinning from ear to ear and enthused every ride."

802 Compact in mbr - Best in Test and Hardtail of the Year Award Winner

801
TYPICAL USAGE: CROSS COUNTRY/TRAIL



Shimano 3x9spd drivetrain provides gears for all terrain / Maxxis Ikon tyres roll fast and grip well / RockShox 30 Silver fork with TurnKey lockout and Solo Air
X8 PERFORMANCE HARDTAIL 650b/27.5"





802 COMPACT-FIT

TYPICAL USAGE: CROSS COUNTRY/TRAIL



Compact geometry for riders with smaller proportions / Available in size XS / Shorter 170mm cranks as standard / Lightweight hydro formed aluminium frame

X8 PERFORMANCE HARDTAIL 650b/27.5"

805

TYPICAL USAGE: CROSS COUNTRY/TRAIL



Lightweight 6061 aluminium frame bristling with UK features / RockShox Recon Silver fork with TurnKey lockout and 15mm Maxle / Tektro Gemini hydraulic disc brakes

X8 PERFORMANCE HARDTAIL 650b/27.5"

806 COMPACT-FIT

TYPICAL USAGE: CROSS COUNTRY/TRAIL



Shimano Deore 3x10spd drivetrain / Compact geometry and sizing down to XS for smaller riders / Adjustable air-sprung RockShox Recon Silver suspension fork

X8 PERFORMANCE HARDTAIL 650b/27.5"



X 6 S P O R T S H A R D T A I L

650b XC/TRAIL

The 600 series of hardtails brings the performance advantages of 650b wheels and Whyte's award winning off-road geometry to a new lower price point.

Based around the successful previous incarnation of our X8 frameset, the X6 range is primed for year round adventure with design features tailored to the British climate, such as bountiful mud clearance, continuous cable outers for smooth gear shifting and improved cable life and Crud-Catcher mounts to keep the grit out of your teeth.

Combined with custom-drawn tubing to aid comfort and give the perfect ride feel, the 600 series is the ideal entry point into the world of mountain biking. The only thing missing is you.

603

TYPICAL USAGE: CROSS COUNTRY



Also available in Zinc colour option



Lightweight aluminium frame with internal cable routing / SR Suntour suspension with lockout feature / Tektro Auriga hydraulic disc brakes

X6 SPORTS HARDTAIL 650b/27.5"

604 COMPACT-FIT

TYPICAL USAGE: CROSS COUNTRY



Lightweight aluminium frame with compact geometry for smaller riders / 100mm travel SR Suntour suspension fork / Tektro Auriga hydraulic disc brakes with short reach levers

X6 SPORTS HARDTAIL 650b/27.5"

605
TYPICAL USAGE: CROSS COUNTRY



SR Suntour XCM suspension fork with aluminium steerer tube to save weight / Shimano 3x9spd drivetrain / Lightweight aluminium frame with internal cable routing

X6 SPORTS HARDTAIL 650b/27.5"





T - 1 2 9

120MM XC/TRAIL SUSPENSION 29ER

With more awards to its name than any bike we've ever made, including the coveted Trail Bike of the Year award in 2013 and best scoring 29er in 2015, there's little to say about the T-129 that hasn't been said before.

Key to the bike's success is its enviable geometry and the shortest chainstays in the industry. Those factors combine to create a 29er that retains all the renowned mile-munching ability of the large wheel size whilst adding a previously unseen degree of fun.

Riders considering a move to a single-ring groupset will love the range-topping Works SCR option. Sporting super-stiff symmetrical chainstays and restricted to a single chain ring, the Works SCR is a viable short travel enduro machine for riders who love to go fast downhill, uphill, and everywhere in between.

"surefooted, very capable and a hell of a lot more fun than a 120mm 29er really should be. We love it" MBUK ★★★★★

"Technically tenacious, superbly balanced, exploro entertainer with easy 29er speed."
T-129 - highest scoring 29er in 2015 Awards ★★★★★

T-129S
TYPICAL USAGE: TRAIL/XC



RockShox Reverb Stealth seatpost, Revelation RL fork and Monarch DebonAir shock / SRAM GX 2x10spd drivetrain/ WTB tubeless-ready offset rims and tyres

T-129 TRAIL SUSPENSION 29ER

T-129 RS
TYPICAL USAGE: TRAIL



SCR frame with symmetrical chainstays for increased stiffness / Shimano XT 1 by 11 drivetrain / Fox Float 34 with FIT4 Damper with the all new Float DPS double chamber rear shock and Reverb Stealth seatpost

T-129 TRAIL SUSPENSION 29ER



X 2 9 P E R F O R M A N C E H A R D T A I L S

29" XC/TRAIL

The X29 series draws on all our progressive geometry ideas and puts them together in a great value range of aluminium hardtails.

Sharing the same geometry philosophy, the same 100mm of fork travel and the same 29in wheels as our flagship carbon fibre 29-C range, the X29 series is one of the most confidence inspiring 29ers available, giving you a faster, more controlled ride. Integrating the rear disc brake into the chainstay has allowed us to slim down the seatstays and further improve vertical compliance and comfort. We designed the X29 with the UK climate in mind too: mud clearance is exceptional, the cables and brake hoses are routed through the frame to keep them working better for longer, and there are Crud Catcher mounts on the downtube to keep grit out of your teeth.

Whether your ambitions are to spend long days exploring byways and bridleways, to progress in cross country racing, or simply to get fit, you'll find a lot to love in the X29 range.

"I loved it...it's a bike handling dream - built with the British climate in mind. bikemagic.com

529

TYPICAL USAGE: CROSS COUNTRY/TRAIL



6061 Hydro Formed T6 Aluminium frame / Fast rolling Maxxis Ikon tyres / Shimano 3x9spd drivetrain / Tektro Auriga hydraulic disc brakes

X29 PERFORMANCE HARDTAIL

629

TYPICAL USAGE: CROSS COUNTRY/TRAIL



SRAM GX 2x10spd drivetrain / RockShox Recon Silver TK air-sprung fork with 100mm of travel / Fast rolling Maxxis Ikon tyres

X29 PERFORMANCE HARDTAIL



29 - C CARBON PERFORMANCE HARDTAIL 29" XC/RACE

When it comes to carbon fibre, we're proud to admit we're control freaks. We oversee every stage of the process, from developing special combinations of filament grades and resins, to working with the world's leading carbon manufacturers to ensure that the best materials are assembled in the best possible way, using the very best design.

Proven by our XC race teams, the 29-C is an unashamed race weapon: light, stiff, aggressive and fast. And thanks to Whyte's innovative geometry, in the 29-C you'll discover a bike that is more surefooted than the competition when the terrain is technically challenging.

With an emphasis on lightweight wheels - an essential for 29er performance - and race-ready components, all you need to add is your race number and get ready for the flag to drop.

The 2016 frame is our best yet, featuring fully integrated cable routing (including for Stealth Reverb), 1x specific construction and our proprietary Intergrip seat clamp system.

29-CS
TYPICAL USAGE: CROSS COUNTRY/RACE



Light and stiff Easton/DT/Whyte Wheelset / Shimano XT brakes and 1 by 11 drivetrain / RockShox Reba RL fork with 15mm Maxle Lite / Intergrip

29ER CARBON PERFORMANCE HARDTAILS

29-C TEAM
TYPICAL USAGE: CROSS COUNTRY/RACE



RockShox RS1 inverted XC fork / SRAM XX1 1x11spd drivetrain / SRAM Guide RSC brakes / Easton EC-70 seat post and 720mm handlebar / Intergrip

29ER CARBON PERFORMANCE HARDTAILS



CX: CYCLOCROSS

CX RACE/ALL TERRAIN

When we first came to produce a range of Cyclocross bikes, we knew that whatever we designed would look, and ride, like no other. 5 years on and that's still true. We're well known for our confidence inspiring mountain bike geometry, so the lessons learned developing that formula became our starting point: the result is a Cyclocross bike that is more capable in all off-road situations than any drop bar bike you've ever ridden. Slacker than usual headangles, short stems and long front centres combine with hydraulic disc brakes and a SRAM 1x11 groupset, all direct developments from mountain biking.

CX bike, Gravel bike or Adventure bike? Truthfully, it's all of the above. Whether you're looking to race at the highest level or simply want the most versatile drop-bar bike available, Whyte's CX series will help you cover a broad spread of terrain as fast as possible, having maximum fun along the way.

Updates for 2016 include fully integrated cable routing (including for Stealth Reverb), 1x specific construction and our proprietary Intergrip seat clamp system, sealing-in all-weather reliability and creating an exceptional year-round bike.

"Nimble, intuitive, fun to ride." Saxon Cross Team, BikeRadar score ★★★★★

SAXON CROSS
TYPICAL USAGE: CYCLOCROSS/ALL TERRAIN



SRAM Rival 1 hydraulic disc brakes / SRAM Rival 1, Long Cage, 11 Speed / WTB tubeless ready rims and CrossBoss CX tyres / Whyte CX carbon disc fork with 15mm Axle and internal cable routing

CX CYCLOCROSS

SAXON CROSS TEAM
TYPICAL USAGE: CYCLOCROSS/ALL TERRAIN



SRAM Force 1 1x11spd drivetrain and hydraulic disc brakes / Easton ARC-24 tubeless rims with Maxxis TR tyres / Whyte CX carbon disc fork with 15mm Axle and internal cable routing

CX CYCLOCROSS



RD7: ROAD DISC DROP BAR COMMUTER/ANYROAD

The RD7 series of drop bar bikes are an exercise in versatility: fast but robust; comfortable but competitive; ready for anything. Got a 10 mile commute to work? The RD7 is the perfect partner. Need a winter training bike? This is the bike for you. Touring? You bet. Fancy an American style gravel grinder? With clearance for even bigger tyres, we've got that base covered too.

All bikes come with disc brakes for efficient, powerful braking whatever the conditions. In the case of the carbon fibre Cornwall that means Shimano's new 2016 fully hydraulic 105 brakes. Combined with comfortable 28mm tyres and endurance geometry, these are bikes for road riders with a sense of adventure. If that sounds like you, look no further than the RD7.

"a thoroughly sorted all-weather, all-surface machine." Dorset in Cycling Plus Magazine ★★★★★

"Classy commuter built for bad weather" Dorset on BikeRadar ★★★★★

"Matching versatility with leight weight, Whyte's Carbon all-rounder is county class"

Cornwall in BikesEtc 9/10

SUSSEX
TYPICAL USAGE: COMMUTER/ANYROAD



Lightweight disc-specific aluminium frame with alloy fork / Full Shimano Sora with 9spd compact gearing with wide range rear cassette / Powerful mechanical disc brakes / Internal fork routing

RD7 DISK ROAD

SOMERSET **COMPACT-FIT**
TYPICAL USAGE: COMMUTER/ANYROAD



Lightweight disc-specific aluminium frame with alloy fork / Shimano 9spd compact gearing with wide range rear cassette / Powerful mechanical disc brakes / Internal fork routing

RD7 ROAD DISC COMPACT

DORSET
TYPICAL USAGE: COMMUTER/ANYROAD



Disc-specific aluminium frame with carbon fibre fork / TRP HyRd mechanical/hydraulic disc brakes / Shimano Tiagra 10spd compact gearing with wide range rear cassette / Internal fork routing

RD7 DISK ROAD

DEVON **COMPACT-FIT**
TYPICAL USAGE: COMMUTER/ANYROAD



Disc-specific aluminium frame with carbon fibre fork / TRP HyRd mechanical/hydraulic disc brakes / Shimano Tiagra 10spd compact gearing with wide range rear cassette / Internal fork routing

RD7 ROAD DISC COMPACT

SUFFOLK
TYPICAL USAGE: COMMUTER/ANYROAD



Shimano 105 11-speed drivetrain / Powerful TRP HyRd mechanical/hydraulic disc brakes / Carbon fork with alloy steerer tube / Internal fork routing

RD7 DISK ROAD

CORNWALL
TYPICAL USAGE: COMMUTER/ANYROAD



Uni-directional multi-monocoque carbon frame with carbon fork / Shimano 105 fully hydraulic disc brakes / Shimano 105 drivetrain / Internal fork routing

RD7 CARBON ROAD DISC



RRD CARBON ROAD DISC HIGH PERFORMANCE ROAD

The RRD platform takes everything we learned in the development of the versatile RD7 series, and applies that knowledge to a thoroughbred road bike.

With more aggressive geometry than the RD7, the RRD will appeal to sportive riders and fast club riders, particularly those who dream of riding in the high mountains, where the added performance of disc brakes will see you out-braking your rivals into every hairpin, whatever the conditions.

The uni-directional carbon fibre frame incorporates skinny seat stays and a 27.2mm seat post to maximise comfort, while a full-carbon fork with a tapered steerer tube guarantees precise steering.

Both bikes in the range use the latest hydraulic disc brakes from SRAM and Shimano, with all brake hoses and gear cables routed internally. From your local roads to the most gruelling European sportives, the RRD series has all the comfort, confidence, and raw speed you'll need.

STOWE RIVAL
TYPICAL USAGE: ROAD



Uni-directional multi-monocoque carbon frame with carbon fork / SRAM Rival 11spd drivetrain / SRAM Rival hydraulic disc brakes with 160mm rotors

RRD CARBON ROAD DISC

STOWE ULTEGRA
TYPICAL USAGE: ROAD



Shimano Ultegra 11spd groupset including Ultegra full-hydraulic disc brakes / Uni-directional multi-monocoque carbon frame with carbon fork / Whyte Road Disc carbon wheelset

RRD CARBON ROAD DISC



R 7 : F A S T U R B A N S E R I E S FLAT BAR COMMUTER

Mountain bikes and road-going bikes typically have wildly differing geometry. Why? We've never found a good answer to that question. Our R7 series commuter bikes incorporate many of the design principles that distinguish our award winning mountain bikes, such as a long wheelbase and relaxed head angle for high speed stability, and a shorter stem for excellent low speed manoeuvrability. It works in the woods and it works on the city's pot-holed streets too.

Hydraulic disc brakes offer low-maintenance and high performance, puncture-resistant tyres ensure you get to work on time, and internal cable routing maximises these bikes' clean, uncluttered appearance.

A Great British concept for the greatest of British commutes.

"High quality kit on a mountain bike-style frame creates a great urban bike."

Stirling - Urban Warriors Groupstest Winner in Cycling Plus ★★★★★

WHITECHAPEL
TYPICAL USAGE: URBAN/COMMUTER



Tektro hydraulic disc brakes / 1x9spd Shimano drivetrain for urban simplicity / Lightweight aluminium frame

R7 FAST URBAN SERIES

CARNABY COMPACT-FIT
TYPICAL USAGE: URBAN/COMMUTER



Tektro Auriga hydraulic disc brakes with short reach levers / 1x9spd Shimano drivetrain for urban simplicity / Lightweight aluminium frame with compact geometry

R7 FAST URBAN SERIES

SHOREDITCH
TYPICAL USAGE: URBAN/COMMUTER



Lightweight aluminium frame / 1x10spd Shimano mountain bike gearing for city-proof performance / Reliable and powerful Tektro hydraulic disc brakes

R7 FAST URBAN SERIES

VICTORIA COMPACT-FIT
TYPICAL USAGE: URBAN/COMMUTER



Lightweight aluminium frame with compact geometry / Shimano 2x9spd drivetrain / Maxxis Rouler tyres with MaxxShield puncture protection

R7 FAST URBAN SERIES

PORTOBELLO
TYPICAL USAGE: URBAN/COMMUTER



Lightweight aluminium frame with carbon fibre fork / Shimano 2x9spd drivetrain / Vittoria Zaffiro Pro with puncture protection

R7 FAST URBAN SERIES

CAMBRIDGE
TYPICAL USAGE: URBAN/COMMUTER



Carbon fibre fork with lightweight aluminium steerer tube / Lightweight aluminium frame / SRAMs Via Centro 2x10spd urban drivetrain

R7 FAST URBAN SERIES

PIMLICO **COMPACT-FIT**
TYPICAL USAGE: URBAN/COMMUTER



Lightweight aluminium frame with compact geometry / Carbon fibre fork with alloy steerer tube / SRAM 2x10spd compact gearing / Tektro hydraulic disc brakes

R7 FAST URBAN SERIES

STIRLING
TYPICAL USAGE: URBAN/COMMUTER



SRAM Rival 22 groupset / lightweight aluminium frame and carbon fibre fork / Powerful Tektro Gemini hydraulic disc brakes

R7 FAST URBAN SERIES



MONTPELLIER
TYPICAL USAGE: URBAN/COMMUTER



Full carbon frame is 300g lighter than aluminium / SRAM Rival 1, 11 by 11 groupset/ lightweight carbon fibre fork with internal cable routing

R7 FAST URBAN SERIES



C7: ALL TERRAIN SERIES

VERSATILITY WITH COMFORT AND STYLE

Adventure doesn't have to mean scaling mountains or backpacking across a continent - it can be as simple as getting out for a bike ride in the lull between summer thunderstorms, or leaving the map at home and seeing where you end up. Whyte's C7 series of all-terrain bikes are the perfect companions on any such adventures: with low pressure tyres that don't need pumping up before each ride and full-length gear cable outers that keep the grime out and the gears shifting smoothly, these are bikes that are ready to go when you are, complete with all the advantages of Whyte's confidence inspiring geometry and legendary ride quality.

"Very practical and easy to ride. Genuinely nippy, responsive and fun on pretty much any surface."
Caledonian - Women's Cycling Magazine 9/10

FAIRFIELD
TYPICAL USAGE: ALL TERRAIN



Lightweight aluminium frame / Maxxis Roamer tyres with puncture protection / Wide-ratio Shimano gearing / Powerful V-brakes

C7 ALL TERRAIN SERIES

FAIRFIELD WOMEN'S
TYPICAL USAGE: ALL TERRAIN



Partially dropped top tube is stronger than a fully dropped frame / Maxxis Roamer tyres with puncture protection / Wide-ratio Shimano gearing

C7 ALL TERRAIN WOMEN'S

RIDGEWAY
TYPICAL USAGE: ALL TERRAIN



SR Suntour suspension fork with Hydro lockout/ Lightweight aluminium frame / Shimano 3x9spd gearing / Tektro hydraulic disc brakes

C7 ALL TERRAIN SERIES

RIDGEWAY WOMEN'S
TYPICAL USAGE: ALL TERRAIN



SR Suntour suspension fork with Hydro lockout / Partially dropped top tube is stronger than a fully dropped frame / Shimano 3x9spd gearing / Tektro hydraulic disc brakes

C7 ALL TERRAIN WOMEN'S

MALVERN
TYPICAL USAGE: ALL TERRAIN



SR Suntour suspension fork with Hydro lockout / Powerful Shimano disc brakes / Lightweight aluminium frame

C7 ALL TERRAIN SERIES

MALVERN WOMEN'S
TYPICAL USAGE: ALL TERRAIN



SR Suntour suspension with Hydro lockout is lightweight thanks to an alloy steerer tube / Powerful Shimano disc brakes / Lightweight aluminium frame with partially dropped top tube

C7 ALL TERRAIN WOMEN'S

CALEDONIAN
TYPICAL USAGE: ALL TERRAIN



Wide-ratio 3x10spd Shimano Deore/LX gearing / Lightweight aluminium frame / Vittoria Randonneur Trail tyres with double puncture protection

C7 ALL TERRAIN SERIES

CALEDONIAN WOMEN'S
TYPICAL USAGE: ALL TERRAIN



Wide-ratio 3x10spd Shimano Deore/LX gearing / Lightweight aluminium frame with partially dropped top tube / Vittoria Randonneur Trail tyres with double puncture protection

C7 ALL TERRAIN WOMEN'S



C7-e: ALL TERRAIN e-BIKE

TRAVEL FURTHER WITH LESS EFFORT

Young or old, beginner or expert, you'll arrive sooner and fresher on a Whyte C7 e-Bike. The hills become flatter, the horizons extend and you'll enjoy everything you love about cycling and the great outdoors, all with less effort. With readily adjustable, intelligent power assistance on hand it's easy to choose how much effort you want to put in and let the Shimano STEPS motor system do the rest. With up to a 125km (78 miles) range in eco mode, long days in the saddle are within easy reach - and the short 4 hour recharge time means there's never too long to wait until you're ready to go. All Terrain capability is built in, and with our proven Whyte C7 geometry you can be sure you'll stay comfortable, relaxed and in control, whatever your chosen journey has in store.

CONISTON e-BIKE
TYPICAL USAGE: ALL TERRAIN



Shimano STEPS e-Bike drive and control unit/SLX gearing / Shimano Disk Brakes / Vittoria Randonneur Trail tyres with double puncture protection

C7 ALL TERRAIN e-BIKE

CONISTON WOMEN'S e-BIKE
TYPICAL USAGE: ALL TERRAIN



Wide-ratio 3x10spd Shimano Deore/LX gearing / Lightweight aluminium frame / Vittoria Randonneur Trail tyres with double puncture protection

C7 ALL TERRAIN e-BIKE



LIGHTWEIGHT CLASSIC LADIES COMFORT AND STYLE

The Strawberry Hill is Whyte's take on a stylish, comfortable, lifestyle bike. Combining the elegance of a vintage machine with all the technical solutions you'd expect from Whyte, we've concealed a 30-speed Shimano drivetrain behind a full chain guard, and full-length mud-guards keep you as clean and dry as possible, whatever the weather has in store. Meanwhile, you'll appreciate the Strawberry Hill's triple-butt aluminium frame for both its comfort and light weight, making it even easier to get up the hills, or just to lift up the stairs when you get home.

"A perfect balance between practicality and style. A sleek, everyday bike with monster capabilities."
Strawberry Hill in Ride On Magazine Australia 92%



STRAWBERRY HILL



Full-length mud-guards / Shimano 3x10spd drivetrain / Full chainguard / Powerful V-brakes / Lightweight and comfortable Whyte saddle

L7 LIGHTWEIGHT CLASSIC WOMEN'S



WHYTE PARTS AND ACCESSORIES



Upgrade your bike with Whyte Parts and Accessories

Whyte have carefully selected parts and accessories that we are confident will improve your riding experience, offering performance, quality and dare we say it, style. Manufactured by leaders in their field, you can be sure any part that carries the Whyte brand logo has been tried and tested and offers best of breed performance.

For a full list of Whyte parts and accessories please visit: whyte.bike

WHYTE FRAME GEOMETRY

When we talk about a bicycle's geometry, we're talking about the angles and measurements that determine where the rider is positioned between the wheels, and how the bike connects with the ground. It might sound dull, but it's something we get very excited about at Whyte, and with good reason: more than the components or the frame material, a bike's geometry defines the way it rides. We believe our geometry is the best out there and what sets Whyte apart from the competition in every category. Judging by the reviews, we're right.


The Whyte formula has been 16 years in the making: it's a formula that inspires confidence in beginners and casual cyclists alike, whilst allowing our expert race teams to perform to the absolute limits of their ability. As such, confidence is our ultimate goal when we're designing a bike: whether you're cruising the city's pot-holed streets to get to work or competing at the highest level, we want you to feel secure that you're in charge and not the bike.

We achieve this by combining a relaxed head angle (the angle the front fork comes out of the frame) with a longer than average front centre to create a bike that is stable at speed and feels predictable, especially when the terrain gets steeper. To sharpen up the steering response for low-speed precision we spec wide handlebars and short stems. At the back of the bike, we always aim to make the chainstays as short as physically possible to maximise the bike's agility, making it easier to do everything from popping up kerbs to boosting through the gnarliest trail obstacles.

It's a formula that works in all situations, whatever your ambitions and whatever your level of skill. Simply put, geometry can make or break a bike: with Whyte's unique approach, we've ensured you'll get maximum enjoyment from every ride.

Our geometry is explained below. For sizing information please visit our website at whyte.bike

- A Head Angle
- B Seat Angle
- C Top Tube
- D BB Height
- E Stand Over
- F Wheel Base
- G Chain Stay
- H Seat Post
- I Head tube length
- J Seat tube length

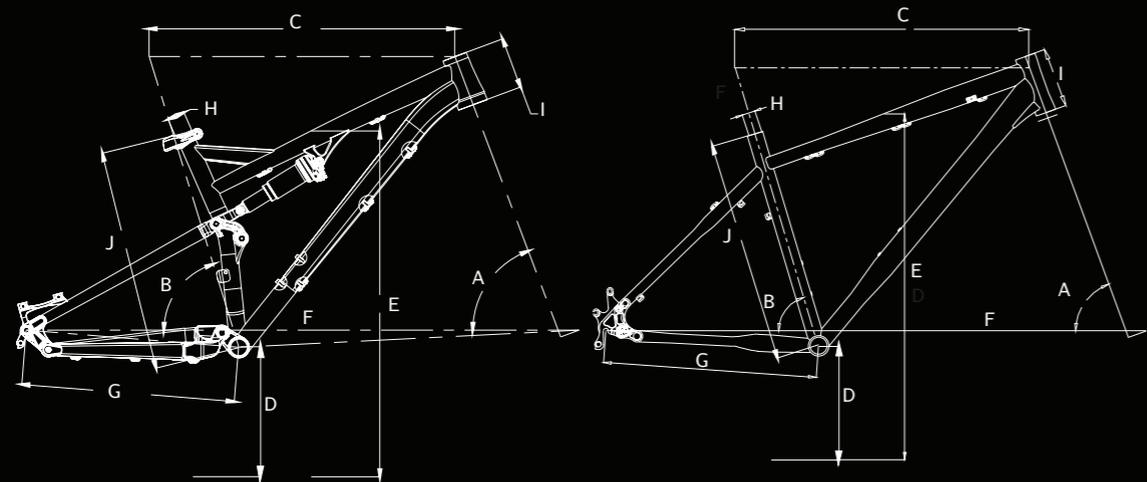

G-160 RS G-160 Works										
Frame Size	A	B	C	D	E	F	G	H	I	J
S	66.0+0/-1	74.7	607.6	342.5	807.5	1181.7	425	30.9	95	406.4
M	66.0+0/-1	74.5	636.6	342.5	815.5	1211.7	425	30.9	110	431.8
L	66.0+0/-1	74.3	655.9	342.5	822.5	1231.7	425	30.9	120	457.2
T-130 SX T-130S T-130 RS T-130C RS T-130C Works										
Frame Size	A	B	C	D	E	F	G	H	I	J
XS	67.0 +0/-1	74	571.7	331	761	1116.5	420	30.9	100	368.3
S	67.0 +0/-1	73.7	591.4	331.0	763	1136.5	420.0	30.9	107	406.4
M	67.0 +0/-1	73.5	611.1	331.0	766	1156.5	420.0	30.9	115	431.8
L	67.0 +0/-1	73.3	631	331.0	776	1176.5	420.0	30.9	120	457.2
XL	67.0 +0/-1	73.2	650.7	331.0	786	1196.5	420.0	30.9	130	482.6
901 905 905 RS 909										
Frame Size	A	B	C	D	E	F	G	H	I	J
S	66.5	73.0	618.7	305.0	767	1138.8	425	30.9	110	406.2
M	66.5	73.0	637.5	305.0	795	1168.8	425	30.9	120	431
L	66.5	73.0	655.1	305.0	822	1178.8	425	30.9	140	457.2
XL	66.5	73.0	673.9	305.0	851	1203.8	430	30.9	150	482.6
405										
Frame Size	A	B	C	D	E	F	G	H	I	J
13	68.5	74.0	563.3	305.0	714	1076	425	30.9	100.0	331.0
801 805										
Frame Size	A	B	C	D	E	F	G	H	I	J
S	68.5	73.5	593.5	303.5	778.5	1107.1	435	30.9	115	406
M	68.5	73.5	608.1	303.5	796.5	1122.6	435	30.9	125	444
L	68.5	73.0	627.9	303.5	821.5	1137.4	435	30.9	135	482.6
XL	68.5	73.0	638.8	303.5	850.5	1149.1	435	30.9	145	533
802 806										
Frame Size	A	B	C	D	E	F	G	H	I	J
XS	68.5	74.0	570.6	303.5	775.5	1089.1	435	30.9	107	381
S	68.5	73.5	585.5	303.5	783.5	1099.1	435	30.9	115	406
M	68.5	73.5	599.6	303.5	803.5	1114.1	435	30.9	125	444

603 605										
Frame Size	A	B	C	D	E	F	G	H	I	J
S	68.5	73.5	593.5	303.5	778.5	1107.1	435	30.9	115	406
M	68.5	73.5	608.1	303.5	796.5	1122.6	435	30.9	125	444
L	68.5	73.0	627.9	303.5	821.5	1137.4	435	30.9	135	482.6
XL	68.5	73.0	638.8	303.5	850.5	1149.1	435	30.9	145	533
604										
Frame Size	A	B	C	D	E	F	G	H	I	J
XS	68.5	74.0	570.6	303.5	775.5	1089.1	435	30.9	107	381
S	68.5	73.5	585.5	303.5	783.5	1099.1	435	30.9	115	406
M	68.5	73.5	599.6	303.5	803.5	1114.1	435	30.9	125	444
L	68.5	73.5	613.7	303.5	829	1129.1	435	30.9	135	482.6
T-129S T-129 RS										
Frame Size	A	B	C	D	E	F	G	H	I	J
S	67.0 +0/-1	74.2	593.4	335	800	1156.1	430.9	30.9	100	406.4
M	67.0 +0/-1	74	613.4	335	805	1176.1	430.9	30.9	100	431.8
L	67.0 +0/-1	73.8	633.1	335	810	1196.1	430.9	30.9	110	457.2
XL	67.0 +0/-1	73.6	652.8	335	815	1216.1	430.9	30.9	120	482.6
529 629										
Frame Size	A	B	C	D	E	F	G	H	I	J
S	68.5	73.0	611.1	305	800	1123	440.0	30.9	110	406.4
M	68.5	73.0	625.6	305	810	1138	440.0	30.9	115	444.5
L	68.5	73.0	645.2	305	836	1158	440.0	30.9	120	495.7
XL	68.5	73.0	664.5	305	850	1178	440.0	30.9	135	533.4
29-CS 29-C TEAM										
Frame Size	A	B	C	D	E	F	G	H	I	J
S	69.3	72.8	612.2	304	789	1117.3	437.5	30.9	100	406
M	69.3	72.8	627	304	809	1127.9	437.5	30.9	110	444.5
L	69.3	72.8	640.8	304	844	1144.9	437.5	30.9	120	495.7
Saxon Cross Saxon Cross Team										
Frame Size	A	B	C	D	E	F	G	H	I	J
52	70.0	74	560.2	283.0	793	1034.7	415	30.9	145	520
54	70.0	73.5	574.5	283.0	808	1044.7	415	30.9	160	540
56	70.0	73.0	589.2	283.0	823	1054.7	415	30.9	175	560
58	70.0	73.0	598.3	283.0	838	1064.7	415	30.9	190	580

Geometry details were correct at the time of printing. However, product changes may occur after this time. Please check model availability and full geometry details with your dealer prior to ordering.

Sussex Dorset Suffolk										
Frame Size	A	B	C	D	E	F	G	H	I	J
50	72.0	74.5	525	271.5	763.5	992.9	425	27.2	130	500
52	72.5	74	540	271.5	781.5	998.4	425	27.2	145	520
54	73.0	73.5	555	271.5	798.5	1003.3	425	27.2	160	540
56	73.0	73	570	271.5	814.5	1012.8	425	27.2	175	560
58	73.0	73	585	271.5	830.5	1027.8	425	27.2	190	580
Somerset Devon										
Frame Size	A	B	C	D	E	F	G	H	I	J
47	71.5	75	507	269.0	721	984.8	425	27.2	115	470
49	72	74.5	515	271.5	742.5	985	425	27.2	130	490
51	72.5	74	525	271.5	776.5	985.4	425	27.2	145	510
53	73	73.5	535	271.5	793.5	985.4	425	27.2	160	530
Cornwall										
Frame Size	A	B	C	D	E	F	G	H	I	J
51	71.5	72.5	543	279	758	1005	430	27.2	120	510
54	72	72.5	553	279	788	1011	430	27.2	155	540
57	72	72	568	282	817	1022	430	27.2	180	570
60	72	72	593	281	843	1047	430	27.2	210	600
Stowe Rival Stowe Ultegra										
Frame Size	A	B	C	D	E	F	G	H	I	J
51	72.5	73.5	540	272	750	999	430	27.2	120	510
54	73	73.5	549	272	784	1005	430	27.2	155	540
57	73	73	566	274	808	1016	430	27.2	180	570
Whitechapel Shoreditch Portobello Cambridge Stirling										
Frame Size	A	B	C	D	E	F	G	H	I	J
S	69.5	74.0	567.9	271.5	721.5	1047.8	420	27.2	145	406.4
M	70.0	73.5	595.7	271.5	753.5	1079.2	420	27.2	165	444.5
L	70.0	73.0	613	271.5	785.5	1094.1	420	27.2	185	495
XL	70.0	73.0	626.9	271.5	816.5	1109.3	420	27.2	205	533
Carnaby Victoria Pimlico										
Frame Size	A	B	C	D	E	F	G	H	I	J
S	69	74.5	546.5	271.5	737.5	1040.2	420	27.2	140	393.7
M	69.5	73.5	572.1	271.5	740.5	1052.2	420	27.2	160	431.8
L	70	73	598.3	271.5	772.5	1069.2	420	27.2	180	469.9
Montpellier										
Frame Size	A	B	C	D	E	F	G	H	I	J
M	70.0	73.5	597	271.5	744	1069.1	420	27.2	140	444.5
L	70.0	73.0	616.1	271.5	776	1084	420	27.2	160	495.0
XL	70.0	73.0	623.3	271.5	804.1	1099.1	420	27.2	180	533.0

Fairfield										
Frame Size	A	B	C	D	E	F	G	H	I	J
S	69.0	74.0	563	288.0	773	1079.8	445	30.9	160	457
M	69.0	73.5	586.9	288.0	798	1099.9	445	30.9	180	495
L	69.0	73.5	605.2	288.0	838	1119.8	445	30.9	200	546
Fairfield Women's										
Frame Size	A	B	C	D	E	F	G	H	I	J
S	69.0	74.5	546.7	288.0	712	1066	445	30.9	130	431.8
M	69.0	74	563	288.0	735	1079.8	445	30.9	160	457.0
L	69.0	73.5	586.9	288.0	761	1099.9	445	30.9	180	495.0
Ridgeway Malvern Caledonian										
Frame Size	A	B	C	D	E	F	G	H	I	J
S	69.0	74	589.4	288.0	784	1100.6	435	30.9	115	457
M	69.0	73.5	614.2	288.0	815	1120.5	435	30.9	125	495
L	69.0	73.0	629.2	288.0	842	1130.6	435	30.9	135	546
XL	69.0	73.0	644	288.0	864	1146	435	30.9	145	585
Ridgeway Women's Malvern Women's Caledonian Women's										
Frame Size	A	B	C	D	E	F	G	H	I	J
S	68.0	74.5	556.6	288.0	728	1082.9	435	30.9	107	431.8
M	69.0	74	584.4	288.0	747	1095.4	435	30.9	115	457.0
L	69.0	73.5	609.2	288.0	766.9	1105.4	435	30.9	125	495.0
Coniston e-Bike										
Frame Size	A	B	C	D	E	F	G	H	I	J
S	69.5	74	591	288.0	767	1107	445	30.9	115	406.4
M	70	73.5	617.6	288.0	821	1123.3	445	30.9	125	444.5
L	70	73	637.8	288.0	825	1138.3	445	30.9	135	495.3
Coniston Women's e-Bike										
Frame Size	A	B	C	D	E	F	G	H	I	J
S	68	74.5	557	288.0	716	1093	445	30.9	107	406.4
M	69	74	584	288.0	748	1106	445	30.9	115	444.5
L	69	73.5	590	288.0	768	1126	445	30.9	125	495.3
Strawberry Hill										
Frame Size	A	B	C	D	E	F	G	H	I	J
S	68.0	74.5	537.3	288.0	663	1066	445	30.9	130	431.8
M	69.0	74	563	288.0	686	1079.8	445	30.9	160	457.0
L	69.0	73.5	586.8	288.0	677	1099.8	445	30.9	180	495.0

	Gravity Enduro 650b/27.5"		T-130 Trail Suspension 650b/27.5"	
Model	G-160 RS	G-160 WORKS	T-130 SX	T-130S
Colour	Matt Granite/Aqua & Apple	Matt Burnt Orange/Black and Denim	Magenta with Black/Aqua	Matt Orange with Black/Denim
Sizes Available	S, M, L	S, M, L	XS,S,M,L	S,M,L,XL
Frame	6061 T6 SCR Aluminium Front Triangle with Tapered Head Tube and Intergrip integrated seat clamp, ISCG 5 guide mounts, alloy symmetrical SCR rear Triangle, 148mm Dropouts	6061 T6 SCR Aluminium Front Triangle with Tapered Head Tube and Intergrip integrated seat clamp, ISCG 5 guide mounts, alloy symmetrical SCR rear Triangle, 148mm Dropouts	6061 T6 Aluminium Front Triangle with Tapered Head Tube and Intergrip integrated seat clamp system, alloy rear Triangle with 12mm E-Thru 148 dropouts, Shimano Direct Mount hanger	6061 T6 SCR Aluminium Front Triangle with Tapered Head Tube and Intergrip integrated seat clamp system, alloy symmetrical SCR rear Triangle
Fork	RockShox Pike RC, 27.5", 160mm Travel, Fast Black coating, tapered steerer and Boost 110mm X 15mm Maxle	RockShox Pike, RCT3, 27.5", 160mm Travel, Fast Black coating, tapered steerer and Boost 110mm X 15mm Maxle	SR Suntour Aion LO-R 27.5" CTS, Air Spring, 130mm Travel, Tapered steerer and 15QR	RockShox Yari 27.5" 110mm Boost, RL, 130mm Travel, Fast Black coating, Tapered steerer and 15mm Maxle
Rear Shock	RockShox Monarch Debonair, RT3, Fast Black coating, Adjustable Rebound and Compression	RockShox Monarch Plus Debonair, RC3, Fast Black coating, Adjustable Rebound and Compression	Fox Float DPS Performance, Rebound Adjustment and 3pos Evol	RockShox Monarch Debonair, RT3, Fast Black coating, Adjustable Rebound and Compression
Headset	FSA No. 57E Orbit ZS, 1.5" Cartridge Sealed Lower Bearing and 1 1/8" Cartridge Upper Bearing	Hope, Stainless Steel Cartridge Sealed Upper and Lower Bearings	FSA No. 57E Orbit ZS, 1.5" Cartridge Sealed Lower Bearing and 1 1/8" Upper Bearing	FSA No. 57E Orbit ZS, 1.5" Cartridge Sealed Lower Bearing and 1 1/8" Upper Bearing
Rear Hub	Alloy, Double Sealed Cartridge Bearing Hub Boost 12mm X 148mm Through Axle, 32 Hole	SRAM Rail 40, Boost 12 x 148mm	Alloy, Double Sealed Cartridge Bearing Hub, 12mm X 148mm Through Axle, 32	Alloy, Double Sealed Cartridge Bearing Hub, Boost 12mm X 148mm Through Axle, 32 Hole
Front Hub	Alloy, Double Sealed Cartridge Bearing Hub Boost Hub 15mm x 110mm, 32 Hole	SRAM Rail 40, Boost 15 x 110mm	Alloy, Double Sealed Cartridge Bearing Hub 15mm X 100mm Through Axle, 32 Hole	Alloy, Double Sealed Cartridge Bearing Hub, Boost 15mm 110mm, 32 Hole
Spokes	WTB 2.0mm, Black Sandvik Stainless Steel Spokes	SRAM Rail 40, StSt Butted	WTB 2.0mm, Black Sandvik Stainless Steel Spokes, Brass Nipples	WTB 2.0mm, Black Sandvik Stainless Steel Spokes, Brass Nipples
Rims	WTB Asym i29 Rims with TCS System, Sleeve Joint, Tubeless Ready	SRAM Rail 40, 23mm wide 27.5", Full UST Rims	WTB Asym i23 27.5" TCS System, Tubeless Ready, 32 Hole	WTB Asym i23 27.5" Rims with TCS System, Tubeless Ready
Tyres	WTB Vigilante AM TCS Light Fast Rolling 27.5 X 2.3" Folding Front, WTB Riddler TCS light Fast Rolling 27.5" X 2.4" Folding Rear	Maxxis High Roller II TR, 27.5" X 2.3" 60TPI 3C(Maxx Terra) Folding Bead, EXO Sidewall protection Front, Maxxis Minion SS, 27.5" X 2.3" 60TPI Daul TLR, Folding Bead, EXO Sidewall protection	WTB Trail Boss, TCS Light Fast Rolling 27.5" X 2.25", Folding Front, WTB Beeline, TCS Light Fast Rolling 27.5" X 2.2", Folding Rear	WTB Trail Boss, TCS Light Fast Rolling 27.5" X 2.25", Folding
Shift Levers	SRAM X-1, MMX Matchmaker, 11 Speed	SRAM X0, MMX Matchmaker, 11 Speed	Shimano SLX, I-Spec, 10 Speed, Black	SRAM GX MMX Matchmaker, 11 Speed
Front Derailleur	N/A	N/A	Shimano Deore M-618, High Direct Mount, 10 Speed, Black	N/A
Rear Derailleur	SRAM X-1, 11 Speed Alloy	SRAM XX1, 11 Speed, Carbon	Shimano XT M-786, Shadow Plus, 10 Speed, Direct Mount	SRAM GX, 11 Speed
Cassette	SRAM XG-1175 10-42, 11 Speed	SRAM XG1195 10-42, 11 Speed	Shimano HG81 11-36, 10 Speed	SRAM PG-1175 10-42, 11 Speed
Chain	SRAM PC1, 11 Speed	SRAM PCX1, 11 Speed	Shimano HG54, 10 Speed	SRAM PC-1130, 11 Speed
Crankset	SRAM X1-1000 GXP, XSYNC Direct Mount 32T chainring, 11 Speed Alloy	SRAM X01 Carbon Cranks, XSYNC direct mount 32T Chainring, 11 Speed	RaceFace Ride, 22/36, 10 Speed, Compact Double	SRAM GX S1000 GXP, 30T, 11 Speed
Bottom Bracket	SRAM GXP Team 73mm	Hope Stainless Steel 73mm BSA	Race Face BSA 24mm	SRAM GXP, 73mm
Seatpost	RockShox Reverb 125 Stealth, MMX MatchMaker, 30.9 X 380mm	RockShox Reverb Stealth 125mm, MMX Matchmaker, 30.9 X 380mm	KS LEV-Integra, Dropper Post with KG remote, 30.9 X 342mm, 100mm travel	RockShox Reverb 125mm Stealth, MMX Matchmaker, 30.9 X 380mm
Seat	Whyte Custom dual density, triple panel design	Whyte Custom, triple Panel Design	Whyte Custom, dual density, triple panel design	Whyte Custom dual density, triple panel design
Bar	Whyte Custom Alloy, 15mm Rise, 780mm Wide	RaceFace SIXC Carbon 35mm Oversize, 800mm wide, 20mm rise	Whyte Custom Alloy, 15mm Rise, 760mm Wide	Whyte Custom Alloy, 15mm Rise, 760mm Wide
Stem	Whyte Gravity Stem, 40mm	Easton Haven 35mm Oversize, 32mm long	Whyte Gravity Stem, 40mm XS/S, 50mm M/L	Whyte Gravity Stem, 40mm S/M, 50mm L/XL
Grips	Whyte Lock-on	Whyte Lock-on	Whyte Lock-on	Whyte Lock-on
Front Brake	SRAM Guide R, 4 Pots, 180mm Rotor, Internal Routing	SRAM Guide RSC, 4 Pots, 180mm Rotor, Internal Routing	TRP Slate T4, Four Pot, I-spec, 180mm Rotor, Internal Routing	SRAM DB5, 180mm Rotor, Internal Routing
Rear Brake	SRAM Guide R, 4 Pots, 180mm Rotor, Internal Routing	SRAM Guide RSC, 4 Pots, 180mm Rotor, Internal Routing	TRP Slate T4, Four Pot, I-spec, 160mm Rotor, Internal Routing	SRAM DB5, 160mm Rotor, Internal Routing
Brake Levers	SRAM Guide R, MMX Matchmaker	SRAM Guide RSC MMX Matchmaker	TRP Slate, I-Spec	SRAM DB5 MMX Matchmaker
Pedals	None	None	None	None

	T-130 Trail Suspension 650b/27.5"			Trail Hardtail 650b/27.5"
Model	T-130 RS	T-130C RS	T-130C WORKS	901
Colour	Matt Granite with Lime/Magenta	Orange with Grey/Denim	Matt Orange with Black/Denim	Matt Zinc with Lime/Grey
Sizes Available	S, M, L, XL	M, L, XL	M, L, XL	S,M,L,XL
Frame	6061 T6 SCR Aluminium SCR Front Triangle with Tapered Head Tube and Intergrip integrated seat clamp system, alloy symmetrical SCS rear Triangle, 148mm dropouts, Shimano Direct Mount hanger	Uni-directional Multi Monocoque Front Triangle with internal cable routing, Tapered Head Tube and Intergrip integrated seat clamp system with alloy symmetrical SCR rear Triangle, 148mm Dropouts	Uni-directional Multi Monocoque Front Triangle with internal cable routing, Tapered Head Tube and Intergrip seat clamp with alloy symmetrical SCR rear Triangle, 148mm Dropouts, Shimano Direct Mount hanger	6061 Hydro Formed T6 Aluminium, Custom Drawn and Multi Butted, Tapered Headtube, Get A Grip seat clamp system, Internal Stealth Reverb routing
Fork	RockShox Pike RC, 27.5", 130mm Travel, Fast Black coating, tapered steerer and Boost 110mm X 15mm Maxle	RockShox Pike RC, 27.5", 130mm Travel, Fast Black coating, tapered steerer and Boost 110mm X 15mm Maxle	Fox Float Factory 34, 27.5", 130mm Travel with FIT4 Damper, Tapered steerer, Kashima Coating and 15mm x 100mm Thru Axle	RockShox Sektor Gold 27.5" Lock-out, Maxle Light 130mm Travel, Solo Air, Adjustable Compression and Rebound, Tapered Steerer
Rear Shock	RockShox Monarch Debonair, RT3, Fast Black coating, Adjustable Rebound and Compression	RockShox Monarch Debonair, RT3, Fast Black coating, Adjustable Rebound and Compression	Fox Float DPS Factory, Kashima, Rebound Adjustment and 3pos Adjust Evol	N/A
Headset	FSA No. 57E Orbit ZS, 1.5" Cartridge Sealed Lower Bearing and 1 1/8" Upper Bearing	FSA No. 42 Integrated, Orbit ZS Plus, 1 1/8" - 1 1/2" Sealed Cartridge Bearings	FSA No. 42 Integrated, Orbit ZS Plus, 1 1/8" - 1 1/2" Sealed Cartridge Bearings	FSA No. 57B Orbit ZS, Sealed Cartridge Bearing 1.5" Lower, 1 1.8" Caged Upper Bearings
Rear Hub	SRAM Roam 30, Boost 12 x 148mm	SRAM Roam 40, Boost 12 x 148mm	Whyte Cartridge sealed bearing, 28H, Boost 12mm X 148mm with Micro Engagement 6 Pawl Shimano Free Hub	Alloy, Cup & Cone, Double Seal, 32 Hole
Front Hub	SRAM Roam 30, Boost 15 x 110mm	SRAM Roam 40, Boost 15 x 110mm	Whyte Cartridge sealed bearing, 28H, 15mm x 100mm	Alloy, Cup & Cone, Double Seal, 15mm Through Axle, 32 Hole
Spokes	SRAM Roam 30, StSt Butted	SRAM Roam 40, StSt Butted	DT Comp RACE 2.0mm with 14mm Brass Nipples	WTB 2.0mm, Black Sandvik Stainless with Brass Nipples
Rims	SRAM Roam 30, 21mm wide 27.5", Full UST Rims	SRAM Roam 40, 21mm wide 27.5", Full UST welded Rims	Whyte 30mm Carbon Hookless, 28H, Tubeless Ready, 3M Rim strip with Tubeless valve included	Whyte Trail 21 Offset Disc rim, 32 Hole
Tyres	WTB Trail Boss, 27.5" X 2.25" TCS, 60TPI Folding	Maxxis High Roller II TR, 27.5" X 2.3" 60TPI 3C(Maxx Terra) Folding Bead, EXO Sidewall protection Front, Maxxis Ardent Race TR 27.5 X 2.2" EXO Sidewall protection, Folding Rear	Maxxis Ardent TR 27.5 X 2.25" EXO Sidewall protection, Folding Front, Maxxis Ardent Race TR 27.5 X 2.2" EXO Sidewall protection, Folding Rear	Maxxis Ardent, 27.5" X 2.25" 60TPI Folding Front, Maxxis Ardent Race, 27.5" X 2.2" 60TPI Folding Rear
Shift Levers	Shimano XT M8000, I-spec II, 11 Speed	SRAM X-1, Matchmaker, 11 Speed	Shimano XT M8000, I-spec II, 11 Speed	SRAM X-5, 10 Speed
Front Derailleur	N/A	N/A	N/A	SRAM GX 36T, 10 Speed
Rear Derailleur	Shimano XT M8000, 11 Speed, Shadow Plus, Direct Mount	SRAM X-0, 11 Speed Carbon	Shimano XT M8000, 11 Speed, Shadow Plus, Direct Mount	SRAM GX Type 2, Medium Cage, 10 Speed
Cassette	Shimano XT M8000 11-42, 11 Speed	SRAM XG-1180 10-42, 11 Speed	Shimano XT M8000 11-42, 11 Speed	SRAM PG-1020, 11-36, 10 Speed
Chain	Shimano XT HG600, 11 Speed	SRAM PCX1, 11 Speed	Shimano HG-600, 11 Speed	SRAM PC-1031, 10 Speed
Crankset	RaceFace Turbine Clinch, direct mount 32T chainring, 11 Speed, Alloy with 30mm alloy axle	SRAM X1-1000 GXP, XSYNC direct mount 32T chainring, 11 Speed Alloy	RaceFace Next Carbon Clinch, direct mount 32T chainring, 11 Speed, Alloy with 30mm alloy axle	SRAM FC S1000, GXP, 22/36, 10 Speed, Double Compact
Bottom Bracket	RaceFace BSA	SRAM GXP Team 73mm	RaceFace BSA	SRAM GXP, 73mm
Seatpost	RockShox Reverb 125 Stealth, MatchMaker, 30.9 X 380mm	RockShox Reverb 125 Stealth, MatchMaker, 30.9 X 380mm	RockShox Reverb 125 Stealth, MatchMaker, 30.9 X 380mm	Whyte 20mm Offset, 30.9mm x 400mm, 6061 Alloy, 2 Bolt Clamp
Seat	Whyte Custom dual density, triple panel design	Whyte Custom dual density, triple panel design	Whyte Custom dual density, triple panel design	Whyte Custom, Triple Panel Design
Bar	Whyte Custom Alloy, 15mm Rise, 760mm Wide	Whyte Custom Alloy, 15mm Rise, 760mm Wide	RaceFace SIXC Carbon, 760mm wide, 20mm rise	Whyte Custom 6061 Alloy, Low Rise, 760mm Wide
Stem	Whyte Gravity Stem, 40mm S, 50mm M/L/XL	Whyte Gravity Stem, 40mm S, 50mm M/L/XL	Whyte Gravity Stem, 40mm S, 50mm M/L/XL	Whyte Gravity Stem, 40mm S/M, 50mm L/XL
Grips	Whyte Lock-on	Whyte Lock-on	Whyte Lock-on	Whyte Custom Lock-on
Front Brake	Shimano XT M8000, 180mm Rotor, Internal Routing	SRAM Guide RS, 4 Pots, 180mm Rotor, Internal Routing	Shimano XT M8000, 180mm Rotor, Internal Routing	SRAM DB3, 180mm Rotor
Rear Brake	Shimano XT M8000, 160mm Rotor, Internal Routing	SRAM Guide RS, 4 Pots, 160mm Rotor, Internal Routing	Shimano XT M8000, 160mm Rotor, Internal Routing	SRAM DB 3, 160mm Rotor
Brake Levers	Shimano XT M8000, I-spec II	SRAM Guide RS, Matchmaker	Shimano XT M8000, I-Spec II	SRAM DB 3
Pedals	None	None	None	None

	Trail Hardtail 650b/27.5"			KIDS TRAIL 26"
Model	905	905 RS	909	405
Colour	Matt orange with black/denim	Matt orange with black/denim	Matt granite with grey	Matt Orange with Grey/Denim
Sizes Available	S,M,L,XL	S,M,L,XL	S,M,L,XL	13
Frame	6061 Hydro Formed T6 Aluminium, Custom Drawn and Multi Butted, Tapered Headtube, Intergrip integrated seat clamp system with Internal Cable routing for Dropper Post	6061 Hydro Formed T6 Aluminium, Custom Drawn and Multi Butted, Tapered Headtube, Intergrip integrated seat clamp system with Internal Cable routing for Dropper Post	6061 Hydro Formed T6 Aluminium, Custom Drawn and Multi Butted, Tapered Headtube, Intergrip integrated seat clamp system with Internal Cable routing for Dropper Post	6061 Hydro Formed T6 Aluminium, Custom Drawn and Multi Butted, Get A Grip seat clamp system
Fork	RockShox Revelation RL, 27.5" Lock-out, Maxle Light 130mm Travel, Fast Black coating, Solo Air, Adjustable Compression and Rebound, Tapered Steerer	RockShox Yari 27.5" 110mm Boost, RL, 130mm Travel, Fast Black coating, Tapered steerer and 15mm Maxle	Fox Float Performance 34, 27.5", 130mm Travel with FIT4 Damper, Tapered steerer and 15mm x 100mm Thru Axle	SR Epixon, 100mm Travel, Alloy Stanchions, Alloy Steerer, Adjustable Rebound, Hydro Lockout
Rear Shock	N/A	N/A	N/A	N/A
Headset	FSA No. 57E Orbit ZS, Sealed Cartridge Bearings, 1.5" Lower, 1 1/8" Upper Bearings	FSA No. 57E Orbit ZS, Sealed Cartridge Bearings, 1.5" Lower, 1 1/8" Upper Bearings	FSA No. 57E Orbit ZS, Sealed Cartridge Bearings, 1.5" Lower, 1 1/8" Upper Bearings	FSA No.10, Semi Integrated, Caged Bearings
Rear Hub	Alloy, Double Sealed, Cartridge Bearing, 32 Hole	Alloy, Double Sealed, Cartridge Bearing, 32 Hole	Hope EVO II with StSt Bearings, 11 Speed Shimano Freehub.	Alloy, 4 Cartridge Sealed Bearing, 28 Hole, XD Driver
Front Hub	Alloy, Double Sealed, Cartridge Bearing Hub, 15mm X 100mm, 32 Hole	Alloy, Double Sealed Cartridge Bearing Hub, Boost 15mm 110mm, 32 Hole	Alloy, Double Sealed Cartridge Bearing Hub, 15mm X 100mm Thru Axle, 32 Hole	Alloy, Cup & Cone, Double Seal, 28 Hole
Spokes	DT Champion 2.0mm Black Stainless with Brass Nipples	DT Champion 2.0mm Black Stainless with Brass Nipples	WTB 2.0mm, Black Sandvik Stainless with Brass Nipples	2.0mm, Black Stainless with Brass Nipples
Rims	WTB Asym i23 TCS 27.5" Tubeless ready rims, 32 Hole	WTB Asym i23 TCS 27.5" Tubeless ready rims, 32 Hole	WTB Asym i23 TCS 27.5" Tubeless ready rims, 32 Hole	Whyte Trail-405, 28 Hole
Tyres	WTB Trail Boss, 27.5" X 2.25" TCS, 60TPI Folding	WTB Trail Boss, 27.5" X 2.25" TCS, 60TPI Folding	Maxxis Ardent TR 27.5" x 2.25", 60TPI Dual Compound, Folding Front, Maxxis Ardent Race TR 27.5" x 2.2", 60TPI Dual Compound with EXO protection, Folding Rear	WTB Bronson Race, 26" X 2.1", 60TPI Folding Front, WTB Riddler, 26" X 1.95", Rear
Shift Levers	Shimano Deore, 10 Speed, I-Spec	SRAM GX MMX Matchmaker, 11 Speed	Shimano XT M8000 I-spec II, 11 Speed	SRAM GX Gripshift, 11 Speed
Front Derailleur	Shimano Deore M-618, 10 Speed	N/A	N/A	N/A
Rear Derailleur	Shimano SLX, Shadow Plus, 10 Speed	SRAM GX, 11 Speed	Shimano XT M8000, 11 Speed, Shadow Plus	SRAM GX, 11 Speed
Cassette	Shimano HG-81 SLX, 11-36, 10 Speed	SRAM PG-1150 10-42, 11 Speed	Shimano XT M8000, 11-42, 11 Speed	SRAM GX 1150, 10-42, 11 Speed
Chain	Shimano HG54, 10 Speed	SRAM PC-1130, 11 Speed	Shimano HG-600, 11 Speed	SRAM PC1130, 11 Speed
Crankset	Race Face Ride, 22/36, 10 Speed, Compact Double	SRAM GX S1000 GXP, 30T, 11 Speed	RaceFace Turbine Clinch, direct mount 32T chainring, 11 Speed, Alloy with 30mm alloy axle	SRAM X1-1000 GXP, XSYNC direct mount 30T chainring, 11 Speed Alloy, 165mm Crank Arms
Bottom Bracket	Race Face	SRAM GXP, 73mm	RaceFace BSA 30mm, 73mm	SRAM GXP, 73mm
Seatpost	KS CRUXi Dropper Post with KG remote, 30.9mm X 425mm, 100mm travel	KS CRUXi Dropper Post with KG remote, 30.9mm X 425mm, 100mm travel	Whyte 20mm Offset, 30.9mm x 350mm, 6061 Alloy, 2 Bolt Clamp	Whyte 20mm Offset, 30.9mm x 350mm, 6061 Alloy, 2 Bolt Clamp
Seat	Whyte Custom, Triple Panel Design	Whyte Custom, Triple Panel Design	Whyte Custom, Triple Panel Design	Whyte Custom
Bar	Whyte Custom Alloy, Low Rise, 760mm Wide	Whyte Custom Alloy, Low Rise, 760mm Wide	Whyte Custom Alloy, Low Rise, 760mm Wide	Whyte Custom 6061 Alloy, Low Rise, 680mm Wide
Stem	Whyte Gravity Stem, 40mm S/M, 50mm L/XL	Whyte Gravity Stem, 40mm S/M, 50mm L/XL	Whyte Gravity Stem, 40mm S/M, 50mm L/XL	Whyte Gravity, 40mm
Grips	Whyte Custom Lock-on	Whyte Custom Lock-on	Whyte Custom Lock-on	SRAM Lock-On's
Front Brake	Shimano BR-615, 180mm Rotor	SRAM DB5, 180mm Rotor, Internal Routing	Shimano XT M8000, 180mm Rotor	Tektro Auriga, 160mm rotor
Rear Brake	Shimano BR-615, 160mm Rotor	SRAM DB5, 160mm Rotor, Internal Routing	Shimano XT M8000, 160mm Rotor	Tektro Auriga, 160mm rotor
Brake Levers	Shimano BL-615, I-Spec	SRAM DB5, MMX Matchmaker	Shimano XT M8000, I-Spec II	Tektro Auriga WS, Adjustable Reach
Pedals	None	None	None	Fibre reinforced Composite Platform

	X-8 Performance Hardtail 650b/27.5"			
Model	801	802	805	806
Colour	Matt Granite with Lime/Grey	Magenta with Black/Aqua	Apple with Grey/White	X.S.S.M
Sizes Available	S,M,L,XL	X.S.S.M	S,M,L,XL	Matt Granite with Grey/Aqua
Frame	6061 Hydro Formed T6 Aluminium, Multi Butted, internal Brake and Cable routing with Chainstay Post Mount Dropouts, Get A Grip seat clamp system	6061 Hydro Formed T6 Aluminium, Multi Butted, internal Brake and Cable routing with Chainstay Post Mount Dropouts, Get A Grip seat clamp system	6061 Hydro Formed T6 Aluminium, Multi Butted, internal Brake and Cable routing with Chainstay Post Mount Dropouts, Get A Grip seat post system	6061 Hydro Formed T6 Aluminium, Multi Butted, internal Brake and Cable routing with Chainstay Post Mount Dropouts, Get A Grip seat clamp system
Fork	RockShox 30 Silver, 100mm Travel, Solo Air, Adjustable Rebound, Alloy Steerer, Turn Key Lockout	RockShox 30 Silver, 100mm Travel, Solo Air, Adjustable Rebound, Alloy Steerer, Turn Key Lockout	RockShox Recon Silver, 100mm Travel, Turn Key Lockout with Adjustable Rebound, Tapered Alloy Steerer with 15mm Maxle	RockShox Recon Silver, 100mm Travel, Solo Air, Adjustable Rebound, Tapered Alloy Steerer, Turn Key Lockout
Rear Shock	N/A	N/A	N/A	N/A
Headset	FSA No. 10, Semi Integrated, Caged Bearings	FSA No. 10, Semi Integrated, Caged Bearings	FSA No. 10 Semi Integrated, 1 1/8" upper and 1.5" lower external cup Caged Bearings	FSA No. 10 Semi Integrated, upper 1 1/8" and 1.5" lower external cup Caged Bearings
Rear Hub	Alloy, Cup & Cone, Double Seal, 32 Hole	Alloy, Cup & Cone, Double Seal, 32 Hole	Alloy, Cup & Cone, Double Seal, 32 Hole	Alloy, Cup & Cone, Double Seal, 32 Hole
Front Hub	Alloy, Cup & Cone, Double Seal, 32 Hole	Alloy, Cup & Cone, Double Seal, 32 Hole	Alloy, Cup & Cone, Double Seal, 32 Hole, 15mm X 100mm Through Axle	Alloy, Cup & Cone, Double Seal, 32 Hole
Spokes	WTB 2.0mm, Black Stainless with Brass Nipples	WTB 2.0mm, Black Stainless with Brass Nipples	WTB 2.0mm, Black Stainless with Brass Nipples	WTB 2.0mm, Black Stainless with Brass Nipples
Rims	Whyte XC-20, sleeve joint, Offset rims, 32 Hole	Whyte XC-20, sleeve joint, Offset rims, 32 Hole	WTB Asym i19 27.5" Rims with TCS System, Tubeless Ready, 32 Hole	WTB Asym i19 27.5" Rims with TCS System, Tubeless Ready, 32 Hole
Tyres	Maxxis IKON Wire 27.5" x 2.2"	Maxxis IKON Wire 27.5" x 2.2"	Maxxis IKON TR Tubeless Ready, Folding 60TPI EXO 27.5" x 2.2"	WTB BeeLine TCS Light Fast Rolling, 27.5" x 2.2" Folding Bead
Shift Levers	Shimano Acera M3000, 9 Speed	Shimano Acera M3000, 9 Speed	SRAM X-5, 10 Speed	Shimano Deore, 10 Speed
Front Derailleur	Shimano Acera M3000, 9 Speed	Shimano Acera M3000, 9 Speed	SRAM GX, 10 Speed	Shimano Deore, 10 Speed
Rear Derailleur	Shimano Deore RD-M592 Shadow	Shimano Deore RD-M592 Shadow	SRAM GX, Medium Cage, Type 2, 10 Speed	Shimano Deore RD-M610 Shadow
Cassette	Shimano HG-200, 11-34, 9 Speed	Shimano HG-200, 11-34, 9 Speed	SRAM PG-1020 11-36, 10 Speed	Shimano HG-50, 11-36, 10 Speed
Chain	Shimano HG-53, 9 Speed	Shimano HG-53, 9 Speed	SRAM PC 1031, 10 Speed	Shimano HG-54, 10 Speed
Crankset	Shimano M4000, 40-30-22, 9 Speed, Octalink	Shimano M4000, 40-30-22, 9 Speed, Octalink	SRAM FC800, 22/36 compact double with Power Spline, 10 Speed	Shimano M523 Hollow Tech, 40-30-22, Silver, 10 Speed with 170mm Cranks
Bottom Bracket	Shimano BB-ES300 Octalink	Shimano BB-ES300 Octalink	SRAM Power Spline	Shimano BB-ES300 Octalink
Seatpost	Whyte 20mm Offset, 30.9mm x 400mm, 6061 Alloy, 2 Bolt Clamp, Adjuster	Whyte 20mm Offset, 30.9mm x 400mm, 6061 Alloy, 2 Bolt Clamp, Adjuster	Whyte 20mm Offset, 30.9mm x 400mm, 6061 Alloy, 2 Bolt Clamp, Adjuster	Whyte 20mm Offset, 30.9mm x 400mm, 6061 Alloy, 2 Bolt Clamp
Seat	Whyte Custom	Whyte Custom	Whyte Custom, Triple Panel Design	Whyte Custom Women's fit
Bar	Whyte Riser Bar 15mm rise, 31.8mm, 700mm Wide	Whyte Riser Bar 15mm rise, 31.8mm, 700mm Wide	Whyte Riser Bar 15mm rise, 31.8mm, 700mm Wide	Whyte Riser Bar 15mm rise, 31.8mm, 700mm Wide
Stem	Whyte Custom, 70mm S, 70mm M, 80mm L & XL	Whyte Custom, 60mm XS, 60mm S, 70mm M	Whyte Custom, 70mm S, 70mm M, 80mm L & XL	Whyte Custom, 60mm XS, 60mm S, 70mm M
Grips	Whyte Custom Lock-on	Whyte Custom Lock-on	Whyte Custom Lock-on	Whyte Custom Lock-on
Front Brake	Tektro Auriga, 160mm rotor	Tektro Auriga, 160mm rotor	Tektro Gemini, 160mm Rotor	Tektro Auriga, 160mm rotor
Rear Brake	Tektro Auriga, 160mm rotor, Internal Routing	Tektro Auriga, 160mm rotor, Internal Routing	Tektro Gemini, 160mm Rotor, Internal Routing	Tektro Auriga, 160mm rotor, Internal Routing
Brake Levers	Tektro Auriga	Tektro Auriga	Tektro Gemini	Tektro Auriga WS
Pedals	Fibre reinforced composite platform	Fibre reinforced composite platform	Fibre reinforced composite platform	Fibre reinforced composite platform

	X-6 Sports Hardtail 650b/27.5"			T-129 Trail Suspension 29er	
Model	603	604	605	T-129S	T-129 RS
Colour	Matt Apple with Grey/Teal	Matt Aqua with Grey/Teal	Matt Orange with Denim/Grey	Matt Apple with Grey/Denim	Matt Zinc with Grey/ Orange
Sizes Available	S,M,L,XL	XS,S,M,L	S,M,L,XL	S,M,L,XL	M,L,XL
Frame	6061 Hydro Formed T6 Aluminium, Custom Drawn, Multi Butted with Internal Cable routing, Post Mount Dropouts	6061 Hydro Formed T6 Aluminium, Custom Drawn, Multi Butted with Internal Cable routing, Post Mount Dropouts	6061 Hydro Formed T6 Aluminium, Custom Drawn, Multi Butted with Internal Routing, Post Mount Dropouts	6061 T6 Aluminium Front Triangle with Tapered Head Tube, Intergrip intergrated seat clamp system and alloy rear Triangle with Maxle 142 dropouts	6061 T6 SCR Aluminium Front Triangle with Tapered Head Tube and Intergrip intergrated seat clamp system, alloy symmetrical SCS rear Triangle, 148mm Dropouts, Shimano Direct Mount hanger
Fork	SR XCM, 100mm Travel, Fixed Rebound Damping, Hydro Lockout	SR XCM, 100mm Travel, Fixed Rebound Damping, Hydro Lockout	SR XCR, 100mm Travel, Alloy Steerer, Adjustable Rebound, Hydro Lockout	RockShox Revelation RL 29", RL, 120mm Travel, Fast Black coating, Tapered steerer and 15mm Maxle Lite	Fox Float Performance 34, 29", 120mm Travel with FIT4 Damper, Tapered steerer and 15mm x 100mm Thru Axle
Rear Shock	N/A	N/A	N/A	RockShox Monarch Debonair, RT, Fast Black coating, Adjustable Rebound and Compression	Fox Float DPS Performance, Rebound Adjustment and 3pos Adjust Evol
Headset	FSA No.10, Semi integrated, Caged Bearings	FSA No.10, Semi integrated, Caged Bearings	FSA No.10, Semi integrated, Caged Bearings	FSA No. 57E Orbit ZS, 1.5" Cartridge Sealed Lower Bearing and 1 1/8" Upper Bearing	FSA No. 57E Orbit ZS, 1.5" Cartridge Sealed Lower Bearing and 1 1/8" Upper Bearing
Rear Hub	Alloy, Cup & Cone, Double Seal, 32 Hole	Alloy, Cup & Cone, Double Seal, 32 Hole	Alloy, Cup & Cone, Double Seal, 32 Hole	Alloy, Double Sealed Cartridge Bearing Hub Boost 12mm X 142mm Through Axle, 32 Hole	Hope EVO II with StSt Bearings, Boost 12mm X 148 mm, 11 Speed Shimano Freehub, 148mm
Front Hub	Alloy, Cup & Cone, Double Seal, 32 Hole	Alloy, Cup & Cone, Double Seal, 32 Hole	Alloy, Cup & Cone, Double Seal, 32 Hole	Alloy, Double Sealed Cartridge Bearing Hub Hub 15mm X 100mm, 32 Hole	Alloy, Double Sealed Cartridge Bearing Hub Hub 15mm X 100mm, 32 Hole
Spokes	2.0mm, Black Stainless with Brass Nipples	2.0mm, Black Stainless with Brass Nipples	2.0mm, Black Stainless with Brass Nipples	WTB 2.0mm, Black Sandvik Stainless Steel Spokes, Brass Nipples	DT Swiss Champion 2.0mm with Brass Nipples
Rims	WTB SX19, 32 Hole	WTB SX19, 32 Hole	WTB SX-19, 32 Hole	WTB Asym i23 29" Rims with TCS System, Tubeless Ready, 32 Hole	WTB Asym i23 29" Rims with TCS System, Tubeless Ready, 32 Hole
Tyres	WTB Nano Wire 27.5" x 2.1"	WTB Nano Wire 27.5" x 2.1"	WTB Nano Wire 27.5" x 2.1"	WTB Trail Boss, TCS Light Fast Rolling, 29" X 2.25", Folding Front, WTB Ninline, TCS Light Fast Rolling, 29" X 2.0", Folding Rear	WTB Trail Boss, TCS Light Fast Rolling, 29" X 2.25", Folding Front, WTB Ninline, TCS Light Fast Rolling, 29" X 2.0", Folding Rear
Shift Levers	Shimano Altus, 8 Speed	Shimano Altus, 8 Speed	Shimano Acera M3000, 9 Speed	SRAM GX MMX Matchmaker, 10 Speed	Shimano XT M8000, I-spec II, 11 Speed
Front Derailleur	Shimano Altus, 8 Speed	Shimano Altus, 8 Speed	Shimano Acera M-3000, 9 Speed	SRAM GX, High Direct Mount, 10 Speed	N/A
Rear Derailleur	Shimano Acera, 9 Speed	Shimano Acera, 9 Speed	Shimano Alivo RD-M4000 Shadow, 9 Speed	SRAM GX, Type 2, 10 speed	Shimano XT M8000, 11 Speed, Shadow Plus, Direct Mount
Cassette	Shimano HG-41, 11-34, 8 Speed	Shimano HG-41, 11-34, 8 Speed	Shimano HG-200-9, 11-34, 9 Speed	SRAM PG-1030 11-36, 10 Speed	Shimano XT M8000, 11-42, 11 Speed
Chain	KMC HG-40, 8 Speed	KMC HG-40, 8 Speed	KMC HG-53, 9 Speed	SRAM PC-1031, 10 Speed	Shimano XT HG-600, 11 Speed
Crankset	Shimano M361, 42-32-22, 8 Speed	Shimano M361, 42-32-22, 8 Speed	Shimano M3000, 40-30-22, 9 Speed	SRAM GX S1000 GXP, 22/36, Compact Double, 10 Speed	RaceFace Turbine Clinch, direct mount 32T chainring, 11 Speed, Alloy with 30mm alloy axle
Bottom Bracket	Square Taper	Square Taper	Shimano BB-UN26 Square Taper	SRAM GXP, 73mm	RaceFace BSA 73mm
Seatpost	Whyte 20mm Offset, 30.9mm x 350mm, 6061 Alloy, 2 Bolt Clamp	Whyte 20mm Offset, 30.9mm x 350mm, 6061 Alloy, 2 Bolt Clamp	Whyte 20mm Offset, 30.9mm x 350mm, 6061 Alloy, 2 Bolt Clamp	RockShox Reverb 125mm Stealth, MMX Matchmaker, 30.9 X 380mm	RockShox Reverb 125 Stealth, MatchMaker, 30.9 X 380mm
Seat	Whyte Custom	Whyte Custom	Whyte Custom	Whyte Custom dual density, triple panel design	Whyte Custom dual density, triple panel design
Bar	Whyte Riser Bar 30mm rise, 31.8mm, 680mm Wide	Whyte Riser Bar 30mm rise, 31.8mm, 680mm Wide	Whyte Riser Bar 30mm rise DB, 31.8mm, 680mm Wide	Whyte Custom Alloy, 15mm Rise, 760mm Wide	Whyte Custom Alloy, 15mm Rise, 760mm Wide
Stem	Whyte Custom, 70mm S & M, 80mm L & 90mm XL	Whyte Custom, 70mm XS & S, 80mm M	Whyte Custom, 70mm S, 80mm M & L, 90mm XL	Whyte Gravity Stem, 40mm S, 50mm M/L/XL	Whyte Gravity Stem, 50mm
Grips	Whyte Custom	Whyte Custom	Whyte Custom Lock-on	Whyte Lock-on	Whyte Lock-on
Front Brake	Tektro Auriga, 160mm Rotor	Tektro Auriga, 160mm Rotor	Tektro Auriga, 160mm Rotor	SRAMDB5, 180mm Rotor	Shimano XT M8000, 180mm Rotor, Internal Routing
Rear Brake	Tektro Auriga, 160mm Rotor	Tektro Auriga, 160mm Rotor	Tektro Auriga, 160mm Rotor	SRAM DB5, 160mm Rotor, Internal Routing	Shimano XT M8000, 160mm Rotor, Internal Routing
Brake Levers	Tektro Auriga	Tektro Auriga WS	Tektro Auriga	SRAM DB5 MMX Matchmaker	Shimano XT M8000, I-spec II
Pedals	Fibre reinforced composite platform	Fibre reinforced composite platform	Fibre reinforced composite platform	None	

	X-29 Performance Hardtail		29er Carbon Performance Hardtails	
Model	529	629	29-CS	29-C TEAM
Colour	Matt Granite with Orange/Grey	Matt Zinc with Lime/Black	Matt Black with Aqua/ Grey	Matt Black with Orange/Grey
Sizes Available	S,M,L,XL	S,M,L,XL	S,M,L	S, M, L
Frame	6061 Hydro Formed T6 Aluminium, Multi Butted, internal Brake and Cable routing with Chainstay Post Mount Dropouts, Get A Grip seat clamp system	6061 Hydro Formed T6 Aluminium, Multi Butted, internal Brake and Cable routing with Chainstay Post Mount Dropouts, Get A Grip seat clamp system	Uni-directional Multi Monocoque with DOX internal cable routing, Post Mount chainstay mounted disk brake and full carbon dropouts, Inter-Grip integrated seat clamp system	Uni-directional Multi Monocoque with DOX internal cable routing, Post Mount chainstay mounted disk brake and full carbon dropouts, Inter-Grip integrated seat clamp system
Fork	RockShox XC-30, 100mm Travel, Adjustable Rebound, TK Lockout	RockShox Recon Silver TK 29", Solo Air, 100mm Travel, Alloy Tapered Steerer and Lock out and rebound	RockShox Reba RL 29", 100mm Travel, Tapered steerer and 15QR, 32mm Stanchions	RockShox RS1 29", 100mm Travel, Fast Black coating, Full Carbon uppers and Tapered steerer, 15mm Maxle Lite
Rear Shock	N/A	N/A	N/A	N/A
Headset	FSA No. 10, Semi integrated, Caged Bearings	FSA No. 10 upper and 1.5" lower external cup Caged Bearings	FSA No. 42 Integrated, Orbit ZS Plus, 1 1/8" - 1 1/2" Sealed Cartridge Bearings	FSA No. 42 Integrated, Orbit ZS Plus, 1 1/8" - 1 1/2" Sealed Cartridge Bearings
Rear Hub	Alloy, Cup & Cone, Double Seal, 32 Hole	Alloy, Cup & Cone, Double Seal, 32 Hole	Alloy, Double Sealed Cartridge Bearing Hub, 32 Hole, Shimano XT QR	Whyte XC-209-Carbon Team Wheelset, 32 StSt spokes, SRAM X-0 32 Hole, XD Driver for 11 Speed
Front Hub	Alloy, Cup & Cone, Double Seal, 32 Hole	Alloy, Cup & Cone, Double Seal, 28 Hole	Alloy, Double Sealed Cartridge Bearing Hub, 32 Hole, 15mm	Whyte XC-209-C Carbon Team Wheelset, 28 StSt spokes, SRAM X-0 28 Hole
Spokes	WTB 2.0mm, Black Stainless with Brass Nipples	WTB 2.0mm, Black Stainless with Brass Nipples	Black Stainless Steel	Double Butted Black Stainless Steel
Rims	Whyte XC-20 29" sleeve joint Offset rims, 32 Hole	Whyte XC-229 29" sleeve joint Offset Rims, 32 Hole Rear, 28 Hole Front	Easton ARC-24, 24mm UST Rims, Tubeless Ready	Whyte X-C-209-Carbon Team Uni-Directional High-Modulus Carbon, 23mm wide, Tubeless Ready
Tyres	Maxxis IKON 60TPI, 29"x 2.2", Folding	Maxxis IKON 60TPI, 29"x 2.2", Folding	Maxxis IKON TR, 29" X 2.2" 120TPI, 3C(Maxx Terra) Folding Bead, EXO Sidewall protection	Maxxis IKON TR, 29" X 2.2" 120TPI, 3C(Maxx Terra) Folding Bead, EXO Sidewall protection
Shift Levers	Shimano Acera M3000, 9 Speed	SRAM X-5, 10 Speed	Shimano XT I Spec II, 11 Speed	SRAM XX1 MMX Matchmaker, 11 Speed
Front Derailleur	Shimano Acera M3000, 9 Speed	SRAM GX, 10 Speed	N/A	N/A
Rear Derailleur	Shimano Deore RD-M592 Shadow	SRAM GX, Type 2, Medium Cage, 10 Speed	Shimano XT M8000, Shadow Plus, 11 Speed	SRAM XX1, 11Speed
Cassette	Shimano HG-200, 11-34, 9 Speed	SRAM PG-1020, 11-36, 10 Speed	Shimano XT M8000, 11-42, 11 Speed	SRAM XX1 XG1199 10-42, 11 Speed
Chain	Shimano HG-53, 9 Speed	SRAM PC 1031, 10 Speed	Shimano, HG600, 11 Speed	SRAM PCXX1, 11 Speed
Crankset	Shimano M4000, 40-30-22, 9 Speed, Octalink	SRAM S1000 GXP, 36-22 29er Ratio, Compact Double, 10 Speed	FSA Comet, Mega EXO, 32t 29er, Speed	SRAM XX1, XSYNC direct mount 32T chainring, 11 Speed
Bottom Bracket	Shimano BB-ES300 Octalink	SRAM GXP, 73mm	FSA Mega EXO, BSA	SRAM GXP Team 73mm
Seatpost	Whyte 20mm Offset, 30.9mm x 400mm, 6061 Alloy, 2 Bolt Clamp	Whyte 20mm Offset, 30.9mm x 400mm, 2014 Alloy, 2 Bolt Clamp	Whyte 20mm Offset, 30.9mm x 400mm, 6061 Alloy, 2 Bolt Clamp, Adjuster	Easton EC-70 Matt UD Carbon, 30.9mm x 400mm, 2 bolt clamp
Seat	Whyte Custom, Triple Panel Design	Whyte Custom, Triple Panel Design	Whyte Custom dual density, triple panel design	Prologo Custom X-Zero, Ti Rail
Bar	Whyte Flat 29er 6061 Bar, 31.8mm, 700mm Wide	Whyte Flat 29er 6061 Bar, 31.8mm, 700mm Wide	Whyte Flat 29er 6061 Bar, 31.8mm, 700mm Wide	Easton EC-70 Matt UD Carbon, Flat Bar, 31.8mm, 720mm Wide
Stem	Whyte Custom, -6 Degree, 70mm S and M and 80mm Large	Whyte Custom, -6 Degree, 70mm S and M and 80mm Large	Whyte Custom, -6 Degree, 70mm S, 80mm M & L	Whyte Custom, -6 Degree, 70mm S, 80mm M & L
Grips	Whyte Custom Lock-on	Whyte Custom Lock-on	Whyte Lock-on, EVA Light-weight Foam	Whyte Lock-on, EVA Light-weight Foam
Front Brake	Tektro Auriga, 180mm rotor	Tektro Gemini, 180mm Rotor	Shimano XT, 180mm Rotor	SRAM Guide RSC, 170mm Rotor, StSt hardware
Rear Brake	Tektro Auriga, 160mm rotor, Internal Routing	Tektro Gemini, 160mm Rotor, Internal Routing	Shimano XT, 160mm Rotor	SRAM Guide RSC, 160mm Rotor, StSt hardware
Brake Levers	Tektro Auriga	Tektro Gemini	Shimano XT I Spec II	SRAM Guide RSC, MMX Matchmaker
Pedals	Fibre reinforced composite platform	Fibre reinforced composite platform	N/A	N/A

	CX Cyclocross		RD7 Disk Road	RD7 Road Disc Compact	RD7 Disk Road
Model	Saxon Cross	Saxon Cross Team	Sussex	Somerset	Dorset
Colour	Matt Granite with Orange/Aqua	Matt Granite with Orange/Aqua	Matt Zinc with Black/Lime	Matt Granite with Lime/Aqua	Matt Granite with Apple/Aqua
Sizes Available	52,54,56,58	52,54,56,58	50,52,54,56,58	47,49,51,53	52,54,56,58
Frame	6061 Hydro Formed T6 Aluminium, Custom Drawn, Multi Butted, Chainstay Post Mount Disk mount with Inter-Grip integrated seat clamp system	6061 Hydro Formed T6 Aluminium, Custom Drawn, Multi Butted, Chainstay Post Mount Disk mount with Inter-Grip integrated seat clamp system	6061 Hydro Formed T6 Aluminium, Custom Drawn, Multi Butted with Post Mount Chainstay Disk mount	6061 Hydro Formed T6 Aluminium, Custom Drawn, Multi Butted with Post Mount Chainstay Disk mount	6061 Hydro Formed T6 Aluminium, Custom Drawn, Multi Butted with Post Mount Chainstay Disk mount
Fork	Straight Bladed Carbon Front Fork with Internal Hose Routing, tapered alloy steerer, Flat Mount dropouts and 15mm Through Axle	Straight Bladed Carbon Front Fork with Internal Hose Routing, tapered alloy steerer, Flat Mount dropouts and 15mm Through Axle	Straight Bladed Alloy Front Fork, Tapered Alloy Steerer with Internal Hose Routing and Post Mount Dropouts and with eyelets for Mud Gaurds	Straight Bladed Alloy Front Fork, Tapered Alloy Steerer with Internal Hose Routing and Post Mount Dropouts and with eyelets for Mud Gaurds	Straight Bladed Carbon Front Fork, Tapered Alloy Steerer with Internal Hose Routing and Post Mount Dropouts and with eyelets for Mud Gaurds
Rear Shock	N/A	N/A	N/A	N/A	N/A
Headset	FSA No. 42 Integrated Road, 1 1/8" upper Sealed Cartridge Bearing, 1.5 lower Sealed Cartridge Bearing	FSA No. 42 Integrated Road, 1 1/8" upper Sealed Cartridge Bearing, 1.5 lower Sealed Cartridge Bearing	FSA No. 42 Integrated Road, 1 1/2" lower Sealed Cartridge Bearing and 1 1/8" upper Sealed Ball Retainer	FSA No. 23 Integrated Road, 1 1/2" lower Sealed Cartridge Bearing and 1 1/8" upper Caged Double Sealed	FSA No. 42 Integrated Road, 1 1/2" lower and 1 1/8" upper Sealed Cartridge Bearings
Rear Hub	Alloy, Double Sealed Cartridge Bearing Hub, 32 Hole	Alloy, Double Sealed Cartridge Bearing Hub, 32 Hole with XD Driver	Alloy, Cup & Cone, Double Seal, 32 Hole	Alloy, Cup & Cone, Double Seal, 32 Hole	Alloy, Double Sealed Cartridge Bearing Hub, 32 Hole
Front Hub	Alloy, Double Sealed Cartridge Bearing Hub, 32 Hole, 15mm	Alloy, Double Sealed Cartridge Bearing Hub, 32 Hole, 15mm Axle	Alloy, Cup & Cone, Double Seal, 28 Hole	Alloy, Cup & Cone, Double Seal, 28 Hole	Alloy, Double Sealed Cartridge Bearing Hub, 28 Hole
Spokes	WTB 2.0mm, Black Sandvik Stainless with Brass Nipples	DT Champion 2.0mm with Brass Nipples	WTB 2.0mm, Black Sandvik Stainless with Black Brass Nipples	WTB 2.0mm, Black Sandvik Stainless with Black Brass Nipples	WTB 2.0mm, Black Sandvik Stainless with Black Brass Nipples
Rims	WTB Custom Asym I19 TCS, Tubeless Ready, I-Beam technology, Disk Specific, 32 Hole	Easton ARC-24, 24mm UST Rims	Whyte Disk Road 32mm Deep, Offset Section Rim, 32 Hole Rear and 28 Front, 3M Reflective Decals	Whyte Disk Road 32mm Deep, Offset Section Rim, 28 Hole Rear and 28 Front, 3M Reflective Decals	Whyte Disk Road 32mm Deep, Offset Section Rim, 32 Hole Rear and 28 Front, 3M Reflective Decals
Tyres	WTB Cross Boss, TCS CX Tyre, DNA Compound, 700 x 35c, Black	Maxxis Mud Wrestler TR, 700 x 33c, 60TPI, 3C(Maxx Terra) Folding Bead, EXO Sidewall protection	Maxxis Rouler, 700 x 28c, with Maxshield Puncture Protection, Black/Grey	Maxxis Rouler, 700 x 28c, Maxshield with Puncture Protection, Aqua/Black, folding	Maxxis Rouler, 700 x 28c, Black/Grey, with Maxshield Puncture Protection, Folding
Shift Levers	SRAM Rival 1, Full Hydraulic, 11 Speed	SRAM Force 1, 11 Speed Carbon Hydraulic Levers	Shimano ST-3500 SORA, 9 Speed	Shimano ST-3500 SORA, 9 Speed	Shimano ST-4700 Tiagra, 10 Speed
Front Derailleur	N/A	N/A	Shimano FD-3500 SORA, 9 Speed	Shimano FD-3500 SORA, 9 Speed	Shimano FD-4700 Tiagra, 10 Speed
Rear Derailleur	SRAM Rival 1, Long Cage, 11 Speed	SRAM Force 1, Mid Cage, 11 Speed	Shimano RD-3500 SORA, 9 Speed	Shimano RD-3500 SORA, 9 Speed	Shimano RD-4700 Tiagra
Cassette	Shimano XT M8000 11-42, 11 Speed	SRAM PG-1170, 11-32, 11 Speed	Shimano HG-300, 11-32, 9 Speed	Shimano HG-300, 11-32, 9 Speed	Shimano CS-4700 Sora 11-32, 10 Speed
Chain	Shimano HG-600, 11 Speed	SRAM PCX1	Shimano HG53, 9 Speed	Shimano HG53, 9 Speed	FSA Team Issue, 10 Speed
Crankset	SRAM Rival 1, XSYNC direct mount 38T chainring, 175mm Crank Length	SRAM Force 1, XSYNC direct mount 38T chainring, 170mm Crank Length, Carbon	Shimano R345-L, 34-50, Octalink, 9 Speed, Compact Double	Shimano R345-L, 34-50, Octalink, 9 Speed, Compact Double	FSA Omega 34-50, 10 Speed, Compact Double
Bottom Bracket	GXP	GXP	Shimano BB-ES300, Octalink	Shimano BB-ES300, Octalink	FSA Mega Exo
Seatpost	Whyte 20mm Offset, 30.9mm x 350mm, 6061 Alloy, 2 Bolt Clamp	Whyte 20mm Offset, 30.9mm x 350mm, 2014 Alloy, 1pcs 3D forged	Whyte 20mm Offset, 27.2mm x 350mm, 1pcs 3D Forged 6061 Alloy, 2 Bolt Clamp	Whyte 20mm Offset, 27.2mm x 350mm, 3D Forged 6061 Alloy, 2 Bolt Clamp	Whyte 20mm Offset, 27.2mm x 350mm, 1pcs 3d Forged 6061 Alloy, 2 Bolt Clamp
Seat	Whyte Custom, Light Weight Triple Density Base, Triple Panel Design	Whyte Custom, Light Weight Triple Density Base, Triple Panel Design	Whyte Custom, Triple Panel Design	Whyte Custom, Triple Panel Design	Whyte Custom, Triple Panel Design
Bar	FSA Omega Compact	FSA Gossamer Compact, 440mm Wide	Whyte Road, 31.8mm, Compact "Wing" Bar	Whyte Road, 31.8mm, Compact "Wing" Bar	Whyte Road, 31.8mm, Compact "Wing" Bar
Stem	Whyte -6 Deg, 70mm 52mm, 80mm 54, 90mm 56mm & 58mm	Whyte -6 Deg, 80mm 54, 90mm 56	Whyte -6 Deg/6 Deg, 100mm 52cm, 110mm 54cm/56cm, 120mm 58cm	Whyte -6 Deg/6 Deg, 80mm 47cm, 90mm 49cm/51cm, 100mm 53cm	Whyte -6 Deg/6 Deg, 100mm 52cm, 110mm 54cm/56cm, 120mm 58cm
Grips	Whyte Anti Slip, Cross Bar Tapes	Whyte Anti Slip, Cross Bar Tapes	Whyte Anti Slip with 3M Reflective logos on tapes	Whyte Anti Slip with 3M Reflective logos on tapes	Whyte Anti Slip with 3M Reflective logos on tapes
Front Brake	SRAM Rival 1 Hydraulic, 160mm Rotor	SRAM Force 1, 160mm Rotor	Pro Max CX Mechanicals, Linear outer cables with Kevlar Reinforcement, 160mm Rotor	Pro Max CX Mechanicals, Linear outer cables with Kevlar Reinforcement, 160mm Rotor	TRP HyRd, Linear outer cables with Kevlar Reinforcement, 160mm Rotor
Rear Brake	SRAM Rival 1 Hydraulic, 160mm Rotor	SRAM Force 1, 160mm Rotor	Pro Max CX Mechanicals, Linear outer cables with Kevlar Reinforcement, 160mm Rotor	Pro Max CX Mechanicals, Linear outer cables with Kevlar Reinforcement, 160mm Rotor	TRP HyRd, Linear outer cables with Kevlar Reinforcement, 160mm Rotor
Brake Levers	SRAM Rival 1 Hydraulic	SRAM Force 1, Carbon	Shimano ST-3500 SORA	Shimano ST-3500 SORA with In Line brake levers	Shimano ST-4700 Tiagra
Pedals	None	None	Fibre reinforced Composite with Toe Clip	Fibre reinforced Composite with Toe Clip	Fibre reinforced Composite Platform

	RD7 Road Disc Compact	RD7 Disk Road	RD7 Carbon Road Disc	RRD Carbon Road Disc	
Model	Devon	Suffolk	Cornwall	Stowe Rival	Stowe Ultegra
Colour	Matt Zinc with Magenta/Aqua	Matt Granite with Orange/Aqua	Matt Black with Grey	Matt UD/Aqua	Matt UD/Aqua
Sizes Available	47,49,51,53	52,54,56,58	51,54,57,60	51cm, 54cm, 57cm	51cm, 54cm, 57cm
Frame	6061 Hydro Formed T6 Aluminium, Custom Drawn, Multi Butted with Post Mount Chainstay Disk mount	6061 Hydro Formed T6 Aluminium, Custom Drawn, Multi Butted with Post Mount Chainstay Disk mount	Uni-directional Multi Mono-coque with internal cable routing, Post Mount chainstay mounted disk brake and full carbon dropouts	Uni-directional Multi Mono-coque with internal cable routing, Post Mount chainstay mounted disk brake and full carbon dropouts	Uni-directional Multi Mono-coque with internal cable routing, Post Mount chainstay mounted disk brake and full carbon dropouts
Fork	Straight Bladed Carbon Front Fork, Tapered Alloy Steerer with Internal Hose Routing and Post Mount Dropouts and with eyelets for Mud Gaurds	Straight Bladed Carbon Front Fork, Tapered Alloy Steerer with Internal Hose Routing and Post Mount Dropouts and with eyelets for Mud Gaurds	Straight Bladed Carbon Front Fork, Tapered Alloy Steerer with Internal Hose Routing and Post Mount Dropouts and with eyelets for Mud Gaurds	Straight Bladed Full Carbon Front Fork with Tapered Alloy Steerer and Post Mount full carbon Dropouts	Straight Bladed Full Carbon Front Fork with internal hose routing, Tapered Carbon Steerer, with Post Mount full carbon Dropouts
Rear Shock	N/A	N/A	N/A	N/A	N/A
Headset	FSA No. 42 Integrated Road, 1 1/2" lower and 1 1/8" upper Sealed Cartridge Bearings	FSA No. 42 Integrated Road, 1 1/2" lower and 1 1/8" upper Sealed Cartridge Bearings	FSA No. 42 Integrated Road, 1 1/2" lower and 1 1/8" upper Sealed Cartridge Bearings	FSA No. 42 Integrated Road, 1 1/2" lower and 1 1/8" upper Sealed Cartridge Bearings	FSA No. 42 Integrated Road, 1 1/2" lower and 1 1/8" upper Sealed Cartridge Bearings
Rear Hub	Alloy, Double Sealed Cartridge Bearing Hub, 32 Hole	Alloy, Double Sealed Cartridge Bearing Hub, 32 Hole, 11 Speed	Whyte Alloy Double Sealed with Cartridge Bearings, 32 Hole	Whyte Alloy Double Sealed with Cartridge Bearings, 28 Hole	Whyte Road Disk Carbon Wheelset, 28 Straight Pull StSt spokes, Alloy Freehub, Center-Lock hub with double sealed cartridge bearings
Front Hub	Alloy, Double Sealed Cartridge Bearing Hub, 28 Hole	Alloy, Double Sealed Cartridge Bearing Hub, 28 Hole	Whyte Alloy Double Sealed with Cartridge Bearings, 28 Hole	Whyte Alloy Double Sealed with Cartridge Bearings, 24 Hole	Whyte Road Disk Carbon Wheelset, 24 Straight Pull StSt spokes, Center-Lock hub with double sealed cartridge bearings
Spokes	WTB 2.0mm, Black Sandvik Stainless with Black Brass Nipples	WTB 2.0mm, Black Sandvik Stainless with Black Brass Nipples	WTB 2.0mm, Black Sandvik Stainless with Brass Nipples	DT Champion 2.0mm, Black Sandvik Stainless with Brass Nipples	Black Stainless Steel Spokes, DT Swiss Prolock Alloy Nipples
Rims	Whyte Disk Road 32mm Deep, Offset Section Rim, 32 Hole Rear and 28 Front, 3M Reflective Decals	Whyte Disk Road 32mm Deep, Offset Section Rim, 32 Hole Rear and 28 Front, 3M Reflective Decals	Whyte Disk Road 32mm Deep, Offset Section Rim, 32 Hole Rear and 28 Front, 3M Reflective Decals	Whyte Road Disk 28mm Offset Deep Section, 28 Hole Rear and 24 Front	Whyte Road Disk Carbon, 24mm Deep, 28 Hole Rear and 24 Front
Tyres	Maxxis Rouler, 700 x 28c, with Maxshield Puncture Protection, Folding, Black/Grey	Maxxis Rouler, 700 x 28c, Black/Grey, with Maxshield Puncture Protection, Folding	Maxxis Rouler, 700 x 28c, Black/Grey, with Maxshield Puncture Protection, Folding	Maxxis Relix, 700 x 25c, 170tpi, with Silkshield Puncture Protection, Folding	Maxxis Relix, 700 x 25c, 170tpi, with Silkshield Puncture Protection, Folding
Shift Levers	Shimano ST-4700 Tiagra, 10 Speed	Shimano 105 ST-5800, 11 Speed	Shimano 105 ST-505, Full Hydraulic brake lever, 11 Speed	SRAM Rival, Full Hydraulic, 11 Speed	Shimano 685, Full Hydraulic, 11 Speed
Front Derailleur	Shimano FD-4700 Tiagra, 10 Speed	Shimano 105 FD-5800, 11 Speed	Shimano 105, 11 Speed	SRAM Rival, Yaw function with Chain Stopper, 11 Speed	Shimano Ultegra with Chain Stopper, 11 Speed
Rear Derailleur	Shimano RD-4600 Tiagra, 10 Speed	Shimano 105 RD-5800, 11 Speed	Shimano 105, 32T Max Capacity, 11 Speed	SRAM Force, 32T Max Capacity, WiFi function, 11 Speed	Shimano Ultegra, Max capacity 32T, 11 Speed
Cassette	Shimano HG-500 11-32, 10 Speed	Shimano 105 CS-5800 11-32, 11 Speed	Shimano 105, 11-32, 11 Speed	SRAM PG-1130, 11-28, 11 Speed	SRAM PG-1130, 11-28, 11 Speed
Chain	FSA Team Issue, 10 Speed	Shimano CN-600, 11 Speed	Shimano HG600, 11 Speed	SRAM PC-1130	FSA Team Issue, 11 Speed
Crankset	FSA Omega 34-50, 10 Speed, 172.5mm Crank Length, Compact Double	FSA Gossamer Pro EVO-386 DB 34-50, 11 Speed, Compact Double	FSA Gossamer Pro EVO-386 DB 34-50, 11 Speed, Compact Double	SRAM Rival 50-34 compact, Yaw function, 11 Speed	FSA SL-K, UD Carbon, EVO-386 36-52, Compact Double, 11 Speed
Bottom Bracket	FSA Mega Exo	FSA EVO-8681	FSA EVO-8681	GXP	EVO 386
Seatpost	Whyte 20mm Offset, 27.2mm x 350mm, 3D Forged 6061 Alloy, 2 Bolt Clamp	Whyte 20mm Offset, 27.2mm x 350mm, 1pcs 3D Forged 6061 Alloy, 2 Bolt Clamp	Whyte 20mm Offset, 27.2mm x 350mm, 3D Forged 2014 Alloy, 2 Bolt Clamp	Whyte 20mm Offset, 27.2mm x 350mm, 2014 Alloy, 2 Bolt Clamp	FSA SL-K, UD Carbon, 27.5mm X 350mm Lg, 20mm offset.
Seat	Whyte Custom, Triple Panel Design	Whyte Custom, Triple Panel Design	Whyte Custom, Light Weight Triple Density Base, Triple Panel Design	Whyte Custom, Light Weight Triple Density Base, Triple Panel Design	Fi'zi:k Aliante Delta, Maganese Rail
Bar	Whyte Road, 31.8mm, Compact "Wing" Bar	Whyte Road, 31.8mm, Compact "Wing" Bar	Whyte Road, 31.8mm, Compact "Wing" Bar	Whyte Road, 31.8mm, Compact "Wing" Bar, 400mm 51, 420mm 54, 440mm 57 & 60	FSA SL-K Compact, UD Carbon, 400/420/440mm
Stem	Whyte -6 Deg/6 Deg, 80mm 47cm, 90mm 49cm/51cm, 100mm 53cm	Whyte -6 Deg/6 Deg, 100mm 52cm, 110mm 54cm/56cm, 120mm 58cm	Whyte -6 Deg, 100mm 51, 110mm 54 & 57, 120mm 60	Whyte -6 Deg (flipflop design), 90mm 51, 100mm 54, 110mm 57 & 60	Whyte -6 Deg (flipflop design), 90mm 51, 100mm 54, 110mm 57 & 60
Grips	Whyte Anti Slip with 3M Reflective logos on tapes	Whyte Anti Slip with 3M Reflective logos on tapes	Whyte Anti Slip with 3M Reflective logos on tapes	Whyte Anti Slip with 3M Reflective logos	Whyte Anti Slip with 3M Reflective logos
Front Brake	TRP HyRd, Linear outer cables with Kevlar Reinforcement, 160mm Rotor	TRP HyRd, Linear outer cables with Kevlar Reinforcement, 160mm Rotor	Shimano BR-785 Hydraulic, 160mm Rotor	SRAM Rival Hydraulic, 160mm Rotor	Shimano 785, Full Hydraulic, 160mm Rotor
Rear Brake	TRP HyRd, Linear outer cables with Kevlar Reinforcement, 160mm Rotor	TRP HyRd, Linear outer cables with Kevlar Reinforcement, 160mm Rotor	Shimano BR-785 Hydraulic, 160mm Rotor	SRAM Rival Hydraulic, 160mm Rotor	Shimano 785, Full Hydraulic, 140mm Rotor
Brake Levers	Shimano ST-4700 Tiagra with In Line Brake Levers	Shimano 105 ST-5800	Shimano ST-505 Hydraulic	SRAM Rival Hydraulic	Shimano 685, Full Hydraulic
Pedals	Fibre reinforced Composite with Toe Clip	Fibre reinforced Composite Platform	None	None	None

R7 Fast Urban Series					
Model	Whitechapel	Carnaby	Shoreditch	Victoria	Portobello
Colour	Matt Zinc with Grey/Lime	Matt Aqua with Black/Grey	Matt Granite with Grey/Orange	Matt Granite with Grey/Aqua	Matt Granite with Grey/Green
Sizes Available	S,M,L,XL	S,M,L	S,M,L,XL	S,M,L	S,M,L,XL
Frame	6061 Hydro Formed T6 Aluminium, Custom Drawn, Multi Butted with Custom Whyte Dropouts	6061 Hydro Formed T6 Aluminium, Custom Drawn, Multi Butted with Custom Whyte Dropouts	6061 Hydro Formed T6 Aluminium, Custom Drawn, Multi Butted with Custom Whyte Dropouts	6061 Hydro Formed T6 Aluminium, Custom Drawn, Multi Butted with Custom Whyte Dropouts	6061 Hydro Formed T6 Aluminium, Custom Drawn, Multi Butted with Custom Whyte Dropouts
Fork	Straight Bladed 6061 T6 Alloy Front Fork with Forged crown, Post mount with Single Eyelets	Straight Bladed 6061 T6 Alloy Front Fork with Forged crown, Post mount with Single Eyelets	Straight Bladed Carbon Front Fork, with Post Mount and Single Eyelets	Straight Bladed 6061 T6 Alloy Front Fork with Forged crown, Post mount with Single Eyelets	Straight Bladed Carbon Front Fork, with Post Mount and Single Eyelets
Rear Shock	N/A	N/A	N/A	N/A	N/A
Headset	FSA No. 23 Integrated Road, 1 1/8" Sealed Cartridge Bearings, 41mm Diameter	FSA No. 23 Integrated Road, 1 1/8" Sealed Cartridge Bearings, 41mm Diameter	FSA No. 23 Integrated Road, 1 1/8" Sealed Cartridge Bearings, 41mm Diameter	FSA No. 23 Integrated Road, 1 1/8" Sealed Cartridge Bearings, 41mm Diameter	FSA No. 23 Integrated Road, 1 1/8" Sealed Cartridge Bearings, 41mm Diameter
Rear Hub	Alloy, Cup & Cone, Double Seal, 32 Hole	Alloy, Cup & Cone, Double Seal, 32 Hole	Alloy, Cup & Cone, Double Seal, 32 Hole	Alloy, Cup & Cone, Double Seal, 32 Hole	Alloy, Cup & Cone, Double Seal, 32 Hole
Front Hub	Alloy, Cup & Cone, Double Seal, 28 Hole	Alloy, Cup & Cone, Double Seal, 28 Hole	Alloy, Cup & Cone, Double Seal, 28 Hole	Alloy, Cup & Cone, Double Seal, 28 Hole	Alloy, Cup & Cone, Double Seal, 28 Hole
Spokes	2.0mm, Black Stainless with Brass Nipples	2.0mm, Black Stainless with Brass Nipples	2.0mm, Black Stainless with Brass Nipples	2.0mm, Black Stainless with Brass Nipples	2.0mm, Black Stainless with Brass Nipples
Rims	Whyte Disk Road 32mm Deep Section Rim, 32 Hole Rear and 28 Front, 3M Reflective Decals	Whyte Disk Road 32mm Deep Section Rim, 32 Hole Rear and 28 Front, 3M Reflective Decals	Whyte Disk Road 32mm Deep Section Rim, 32 Hole Rear and 28 Front, 3M Reflective Decals	Whyte Disk Road 32mm Deep, Offset Section Rim, 32 Hole Rear and 28 Front, 3M Reflective Decals	Whyte Disk Road 32mm Deep, Offset Section Rim, 32 Hole Rear and 28 Front, 3M Reflective Decals
Tyres	Vittoria Zaffiro, 700 x 28c, Black, with Puncture Protection	Vittoria Zaffiro, 700 x 28c, Black, with Puncture Protection	Vittoria Zaffiro Pro, 700 x 28c, Black, with Puncture Protection, Folding	Maxxis Rouler, 700 x 28c, Folding Black/Aqua, with Puncture Protection	Vittoria Zaffiro Pro, 700 x 28c, Black, with Puncture Protection, Folding
Shift Levers	Shimano Altus, 9 Speed	Shimano Altus, 9 Speed	Shimano Deore, 10 Speed	Shimano Sora SL-3500, 9 Speed	Shimano Sora SL-3500, 9 Speed
Front Derailleur	N/A	N/A	N/A	Shimano Sora FD-R3500, 9 Speed	Shimano Sora FD-3500, 9 Speed
Rear Derailleur	Shimano Acera RD-M3000, 9 Speed	Shimano Acera RD-M3000, 9 Speed	Shimano Deore Shadow Plus, 10 Speed	Shimano Sora RD-3500, 9 Speed	Shimano Sora RD-3500, 9 Speed
Cassette	Shimano HG-200-9, 11-34 9 Speed	Shimano HG-200-9, 11-34 9 Speed	Shimano HG-50-10, 11-36 10 Speed	Shimano HG-200, 11-32 9 Speed	Shimano HG-200, 11-32 9 Speed
Chain	KMC CN-HG53, 9 Speed	KMC CN-HG53, 9 Speed	Shimano HG-54, 10 Speed	Shimano HG-53, 9 Speed	KMC CN-HG53, 9 Speed
Crankset	Lasco 42T, with Alloy Chain Guard	Lasco 39T, with Alloy Chain Guard	Lasco 42T Alloy Chain ring and Guard, 10 Speed	Shimano FC-R345-L, Double 50-34, 9 Speed, Octalink	Shimano FC-R345-L, Double 50-34, 9 Speed, Octalink
Bottom Bracket	FSA Square Taper	FSA Square Taper	FSA Square Taper	Shimano, Octalink BB-ES300	Shimano, Octalink BB-ES300
Seatpost	Whyte 20mm Offset, 27.2mm x 350mm, 1pcs 3D Forged 6061 Alloy, 2 Bolt Clamp	Whyte 20mm Offset, 27.2mm x 350mm, 1pcs 3D Forged 6061 Alloy, 2 Bolt Clamp	Whyte 20mm Offset, 27.2mm x 350mm, 1pcs 3D Forged 6061 Alloy, 2 Bolt Clamp	Whyte 20mm Offset, 27.2mm x 350mm, 1pcs 3D Forged 6061 Alloy, 2 Bolt Clamp	Whyte 20mm Offset, 27.2mm x 350mm, 1pcs 3D Forged 6061 Alloy, 2 Bolt Clamp
Seat	Whyte Custom	Whyte Custom Women's, Triple Panel Design	Whyte Custom	Whyte Custom Women's Fit, Triple Panel Design	Whyte Custom, Triple Panel Design
Bar	Whyte Narrow, 31.8mm, 30mm Rise, 580mm Wide	Whyte Narrow, 31.8mm, 30mm Rise, 580mm Wide	Whyte Narrow, 31.8mm, 30mm Rise, 580mm Wide	Whyte Narrow, 31.8mm, 30mm Rise, 580mm Wide	Whyte Narrow, 31.8mm, 20mm Rise, 580mm Wide
Stem	Whyte, 60mm S, 70mm M, 80mm L, 90mm XL	Whyte, 60mm S & M, 70mm L	Whyte, 60mm S, 70mm M, 80mm L, 90mm XL	Whyte, 60mm S, 70mm M, 80mm L	Whyte, 70mm S, 80mm M, 90mm L & XL
Grips	Whyte Custom with extra-thick bar plugs	Whyte Custom with extra-thick bar plugs	Whyte Custom with extra-thick bar plugs	Whyte double Density, Lock-on	Whyte Custom Dual Density Lock-on's
Front Brake	Tektro Auriga, 160mm Rotor	Tektro Auriga 160mm Rotor	Tektro Auriga, 160mm Rotor	Tektro Auriga 160mm Rotor	Tektro Auriga, 160mm Rotor
Rear Brake	Tektro Auriga, 160mm Rotor	Tektro Auriga 160mm Rotor	Tektro Auriga, 160mm Rotor	Tektro Auriga 160mm Rotor	Tektro Auriga, 160mm Rotor
Brake Levers	Tektro Auriga	Tektro Auriga WS	Tektro Auriga	Tektro Auriga WS	Tektro Auriga
Pedals	Fibre reinforced Composite Platform	Fibre reinforced Composite Platform	Fibre reinforced Composite Platform	Fibre reinforced Composite Platform	Fibre reinforced Composite Platform

R7 Fast Urban Series				
Model	Cambridge	Pimlico	Stirling	Montpellier
Colour	Matt Zinc with Grey/Aqua	Matt Zinc with Black/Magenta	Matt Granite with Grey/Orange	Matt Granite with Metallic Brass
Sizes Available	S,M,L,XL	S,M,L	S,M,L,XL	M,L,XL
Frame	6061 Hydro Formed T6 Aluminium, Custom Drawn, Multi Butted with Custom Whyte Dropouts	6061 Hydro Formed T6 Aluminium, Custom Drawn, Multi Butted with Custom Whyte Dropouts	6061 Hydro Formed T6 Aluminium, Custom Drawn, Multi Butted with Custom Whyte Dropouts	Full Carbon Monocoque with tapered headtube and internal cable routing and Full Carbon Dropouts
Fork	Straight Bladed Carbon Front Fork with Alloy Steerer Tube, Full Carbon Dropout and eyelet for Mud Guards	Straight Bladed Carbon Front Fork with Alloy Steerer Tube, Full Carbon Dropout and eyelet for Mud Guards	Straight Bladed Carbon Front Fork with Alloy Steerer Tube, Full Carbon Dropout and eyelet for Mud Guards	Straight Bladed Carbon Front Fork with Alloy Tapered Steerer
Rear Shock	N/A	N/A	N/A	N/A
Headset	FSA No. 23 Integrated Road, 1 1/8" Sealed Cartridge Bearings, 41mm Diameter	FSA No. 23 Integrated Road, 1 1/8" Sealed Cartridge Bearings, 41mm Diameter	FSA No. 23 Integrated Road, 1 1/8" Sealed Cartridge Bearings, 41mm Diameter	FSA No. 42 Integrated Road, 1 1/8" upper Sealed Cartridge Bearings, 1.5 lower Sealed Cartridge Bearing
Rear Hub	Alloy, Cup & Cone, Double Seal, 32 Hole	Alloy, Cup & Cone, Double Seal, 32 Hole	Alloy, Double Sealed Cartridge Bearing Hub, 32 Hole	Alloy, Double Sealed Cartridge Bearing Hub, 32 Hole with XD Driver
Front Hub	Alloy, Cup & Cone, Double Seal, 28 Hole	Alloy, Cup & Cone, Double Seal, 28 Hole	Alloy, Double Sealed Cartridge Bearing Hub, 28 Hole	Alloy, Double Sealed Cartridge Bearing Hub, 28 Hole
Spokes	WTB 2.0mm, Black Stainless with Brass Nipples	WTB 2.0mm, Black Stainless with Brass Nipples	DT Champion, 2.0mm Black Stainless with Brass Nipples	DT Champion 2.0mm, Black Stainless with Brass Nipples
Rims	Whyte Disk Road 32mm Deep, Offset Section Rim, 32 Hole Rear and 28 Front, 3M Reflective Decals	Whyte Disk Road 32mm Deep, Offset Section Rim, 32 Hole Rear and 28 Front, 3M Reflective Decals	Whyte Disk Road 32mm Deep, Offset Section Rim, 32 Hole Rear and 28 Front, 3M Reflective Decals	Whyte Disk Road 32mm Deep, Offset Section Rim, 32 Hole Rear and 28 Front, 3M Reflective Decals
Tyres	Maxxis Rouler, 700 x 28c, Black/Grey, with Maxxshield Puncture Protection, Folding	Maxxis Rouler, 700 x 28c, Black/Grey, with Maxxshield Puncture Protection, Folding	Maxxis Rouler, 700 x 28c, Black/Grey, with Maxxshield Puncture Protection, Folding	Maxxis Rouler, 700 x 28c, Black/Grey, with Maxxshield Puncture Protection, Folding
Shift Levers	SRAM Via Centro, 10 Speed	SRAM Via Centro, 10 Speed	SRAM S700, 11 Speed	SRAM S700, 11 Speed
Front Derailleur	SRAM Via Centro, 10 Speed	SRAM Via Centro, 10 Speed	SRAM Rival 22, 11 Speed	N/A
Rear Derailleur	SRAM Via Centro, 10 Speed	SRAM Via Centro, 10 Speed	SRAM Rival 22, 11 Speed	SRAM Rival 1, Long Cage, 11 Speed
Cassette	SRAM PG-1030, 11-32, 10 Speed	SRAM PG-1030, 11-32, 10 Speed	SRAM PG-1130, 11-32, 11 Speed	SRAM PG-1150, 10-42, 11 Speed
Chain	SRAM PC-1031, 10 Speed	SRAM PC-1031, 10 Speed	SRAM PC-1130, 11 Speed	SRAM PC-1130, 11 Speed
Crankset	SRAM Via Centro, 48-32, 10 Speed, Compact	SRAM Via Centro, 48-32, 10 Speed, Compact	SRAM Rival 22, 50-34 Compact, 11 Speed	SRAM S350, XSYNC direct mount 44T chainring, 175mm Crank Length
Bottom Bracket	SRAM Power Spline, 68mm Shell	SRAM Power Spline, 68mm Shell	SRAM GXP XR	GXP
Seatpost	Whyte 20mm Offset, 27.2mm x 350mm, 1pcs 3D Forged 6061 Alloy, 2 Bolt Clamp	Whyte 20mm Offset, 27.2mm x 350mm, 1pcs 3D Forged 6061 Alloy, 2 Bolt Clamp	Whyte 20mm Offset, 27.2mm x 350mm, 3D Forged 2014 Alloy, 2 Bolt Clamp	Whyte 20mm Offset, 27.2mm x 350mm, 3D Forged 2014 Alloy, 2 Bolt Clamp
Seat	Whyte Custom, Triple Panel Design	Whyte Custom Women's Fit, Triple Panel Design	Whyte Custom, Triple Panel Design	Whyte Custom, Triple Panel Design
Bar	Whyte Narrow, 31.8mm, 30mm Rise, 580mm Wide	Whyte Narrow, 31.8mm, 20mm Rise, 580mm Wide	Whyte Narrow, 31.8mm, 30mm Rise, 580mm Wide	Whyte Narrow, 31.8mm, Riser Bar 30mm, 580mm Wide
Stem	Whyte, 70mm S, 80mm M, 90mm L & XL	Whyte, 70mm XS & S, 80mm M	Whyte, 70mm S, 80mm M, 90mm L & XL	Whyte, 80mm M, 90mm L & XL
Grips	Whyte Custom Dual Density Lock-on's	Whyte double Density, Lock-on	GP1 Ergon, Dual Density	GP1 Ergon Grip, Dual Density
Front Brake	Tektro Gemini, 160mm Rotor	Tektro Auriga 160mm Rotor	Tektro Auriga, 160mm Rotor	Tektro Gemini, 160mm Rotor
Rear Brake	Tektro Gemini, 160mm Rotor	Tektro Auriga 160mm Rotor	Tektro Auriga, 160mm Rotor	Tektro Gemini, 160mm Rotor
Brake Levers	Tektro Gemini	Tektro Auriga WS	Tektro Auriga	Tektro Gemini
Pedals	Fibre reinforced Composite Platform	Fibre reinforced Composite Platform	Fibre reinforced Composite Platform	None

	C7 All Terrain Series	C7 All Terrain Women's	C7 All Terrain Series	C7 All Terrain Women's
Model	Fairfield	Fairfield Women's	Ridgeway	Ridgeway Women's
Colour	Matt Granite with Grey/Orange	Matt Granite with Magenta/Aqua	Matt Granite with Grey/Apple	Matt Granite with Aqua/Magenta
Sizes Available	S,M,L	S,M,L	S,M,L	S,M,L
Frame	6061 Hydro Formed T6 Aluminium, Custom Drawn, Multi Butted, concealed rear brake post	6061 Hydro Formed T6 Aluminium, Custom Drawn, Multi Butted, concealed rear brake post	6061 Hydro Formed T6 Aluminium, Custom Drawn, Multi Butted with Custom Whyte Dropouts	6061 Hydro Formed T6 Aluminium, Custom Drawn, Multi Butted with Custom Whyte Dropouts
Fork	6061 Alloy, curved blade with Alloy Steerer and Eyelets	6061 Alloy, curved blade with Alloy Steerer and Eyelets	SR Suntour NEX HLO, 63mm travel, Hydro Lockout	SR Suntour NEX HLO, 63mm travel with Hydro Lockout
Rear Shock	N/A	N/A	N/A	N/A
Headset	FSA No.10, Semi Integrated, Caged Bearings			
Rear Hub	Alloy, Cup & Cone, Double Seal, 32 Hole	Alloy, Cup & Cone, Double Seal, 32 Hole	Alloy, Cup & Cone, Double Seal, 32 Hole	Alloy, Cup & Cone, Double Seal, 32 Hole
Front Hub	Alloy, Cup & Cone, Double Seal, 32 Hole	Alloy, Cup & Cone, Double Seal, 32 Hole	Alloy, Cup & Cone, Double Seal, 32 Hole	Alloy, Cup & Cone, Double Seal, 32 Hole
Spokes	2.0mm, Silver Stainless with Brass Nipples	2.0mm, Silver Stainless with Brass Nipples	2.0mm, Black Stainless with Brass Nipples	2.0mm, Black Stainless with Brass Nipples
Rims	WTB DX-17 700c, 32 Hole	WTB DX-17 700c, 32 Hole	WTB SX-17 700c, 32 Hole, with eyelets	WTB SX-17 700c, 32 Hole, with eyelets
Tyres	Maxxis Roamer 700 x 42c with Kevlar Puncture Protection	Maxxis Roamer 700 x 42c with Kevlar Puncture Protection	WTB All Terrain Comp 700 x 35c with Flat Guard	WTB All Terrain Comp 700 x 35c with Flat Guard
Shift Levers	Shimano Altus, 8 Speed	Shimano Altus, 8 Speed	Shimano Altus, 9 Speed	Shimano Altus, 9 Speed
Front Derailleur	Shimano FD-M191, 8 Speed	Shimano FD-M191, 8 Speed	Shimano Altus, 9 Speed	Shimano Altus, 9 Speed
Rear Derailleur	Shimano Acera RD-T3000,	Shimano Acera RD-T3000,	Shimano Acera T3000, 9 Speed	Shimano Acera, 9 Speed
Cassette	Shimano CS-HG-31, 11-32, 8 Speed	Shimano CS-HG-31, 11-32, 8 Speed	Shimano HG-200-9, 11-32, 9 Speed	Shimano HG-200-9, 11-32, 9 Speed
Chain	Shimano HG-40, 8 Speed	Shimano HG-40, 8 Speed	KMC CN-HG-53, 9 Speed	KMC CN-HG-53, 9 Speed
Crankset	Shimano M311, 48-38-28, 8 Speed	Shimano M311, 48-38-28, 8 Speed	Shimano M371, 48-36-26, 9 Speed	Shimano M371, 48-36-26, 9 Speed
Bottom Bracket	Square Taper	Square Taper	Square Taper	Square Taper
Seatpost	Whyte 20mm Offset, 30.9mm x 400mm, 6061 Alloy, 2 bolt clamp	Whyte 20mm Offset, 30.9mm x 400mm, 6061 Alloy, 2 bolt clamp	Whyte 20mm Offset, 30.9mm x 400mm, 6061 Alloy, With 2 Bolt Clamp	Whyte 20mm Offset, 30.9mm x 400mm, 6061 Alloy, 2 bolt clamp
Seat	Whyte Custom, triple panel design	Whyte Custom Women's Fit, triple panel design	Whyte Custom, triple panel design	Whyte Custom Women's Fit, triple panel design
Bar	Whyte High Rise 30mm, 31.8mm, 620mm Wide			
Stem	Whyte Custom, 70mm S, 80mm M, 90mm L	Whyte Custom, 70mm S, 80mm M, 90mm L	Whyte Custom, 80mm S, 90mm M & L	Whyte Custom, 70mm S, 80mm M, 90mm L
Grips	Whyte Custom Ergo Dual Density Lock-on's			
Front Brake	Tektro Forged V Brake	Tektro Forged V Brake	Tektro T290, 160mm Rotor	Tektro T290, 160mm Rotor
Rear Brake	Tektro Forged V Brake	Tektro Forged V Brake	Tektro T290, 160mm Rotor	Tektro T290, 160mm Rotor
Brake Levers	Tektro Ergo Style brake lever with Integrated Bell	Tektro Ergo Style brake lever with Integrated Bell	Tektro T290	Tektro T290
Pedals	Alloy Body with Non Slip Grip	Alloy Body with Non Slip Grip	Fibre reinforced Composite Platform	Fibre reinforced Composite Platform

	C7 All Terrain Series	C7 All Terrain Women's	C7 All Terrain Series	C7 All Terrain Women's
Model	Malvern	Malvern Women's	Caledonian	Caledonian Women's
Colour	Matt Granite with Grey	Matt Granite with Lime/Magenta	Matt Zinc with Grey/Aqua	Matt Granite with Aqua/Lime
Sizes Available	S,M,L,XL	S,M,L	S,M,L	S,M,L
Frame	6061 Hydro Formed T6 Aluminium, Custom Drawn, Multi Butted with Custom Whyte Dropouts	6061 Hydro Formed T6 Aluminium, Custom Drawn, Multi Butted with Custom Whyte Dropouts	6061 Hydro Formed T6 Aluminium, Custom Drawn, Multi Butted with Custom Whyte Dropouts	6061 Hydro Formed T6 Aluminium, Custom Drawn, Multi Butted with Custom Whyte Dropouts
Fork	SR Suntour NCX-D LO, 63mm travel, Coil Spring, Hydro Lockout and Alloy Steerer tube	SR Suntour NCX-D LO Lite, 63mm travel, Coil Spring, Hydro Lockout and Alloy Steerer tube	SR Suntour NCX-D LO, 63mm travel, Coil Spring, Hydro Lockout and Alloy Steerer tube	SR Suntour NCX-D LO Lite, 63mm travel, Coil Spring, Hydro Lockout and Alloy steerer tube
Rear Shock	N/A	N/A	N/A	N/A
Headset	FSA No.10, Semi Integrated, Caged Bearings	FSA No.10, Semi Integrated, Caged Bearings	FSA No.10, Semi Integrated, Caged Bearings	FSA No.10, Semi Integrated, Caged Bearings
Rear Hub	Shimano FH-RM-33, 32 Hole with Centre-Lock	Shimano FH-RM-33, 32 Hole with Centre-Lock	Alloy, Cup & Cone, Double Seal, 32 Hole	Alloy, Cup & Cone, Double Seal, 32 Hole
Front Hub	Shimano HB-RM-33, 32 Hole with Centre-Lock	Shimano HB-RM-33, 32 Hole with Centre-Lock	Alloy, Cup & Cone, Double Seal, 32 Hole	Alloy, Cup & Cone, Double Seal, 32 Hole
Spokes	2.0mm, Black Stainless with Brass Nipples	2.0mm, Black Stainless with Brass Nipples	2.0mm, Black Sandvik Stainless Steel with Brass Nipples	2.0mm, Black Sandvik Stainless Steel with Brass Nipples
Rims	WTB SX-17 700c, 32 Hole, with eyelets	WTB SX-17 700c, 32 Hole, with eyelets	WTB SX-17 700c, 32 Hole, with eyelets	WTB SX-17 700c, 32 Hole, with eyelets
Tyres	Vittoria Randonneur Trail 700 x 35c, with Double Shielding puncture protection	Vittoria Randonneur Trail 700 x 35c, with Double Shielding puncture protection	Vittoria Randonneur Trail 700 x 35c, with Double Shielding puncture protection	Vittoria Randonneur Trail 700 x 35c, with Double Shielding puncture protection
Shift Levers	Shimano Acera, 9 Speed	Shimano Acera, 9 Speed	Shimano Deore, 10 Speed	Shimano Deore, 10 Speed
Front Derailleur	Shimano Acera, 9 Speed	Shimano Acera, 9 Speed	Shimano Deore, 10 Speed	Shimano Deore, 10 Speed
Rear Derailleur	Shimano Deore Shadow, 9 Speed	Shimano Deore Shadow, 9 Speed	Shimano LX T670, 10 Speed	Shimano LX T670, 10 Speed
Cassette	Shimano HG-300-9, 11-32, 9 Speed	Shimano HG-300-9, 11-32, 9 Speed	Shimano Deore, CS-HG-62, 11-34, 10 Speed	Shimano Deore, CS-HG-62, 11-34, 10 Speed
Chain	KMC CN-HG53, 9 Speed	KMC CN-HG53, 9 Speed	Shimano HG-54, 10 Speed	Shimano HG-54, 10 Speed
Crankset	Shimano FC-T4010 Alivio, 48-36-26, Octalink, 9 Speed	Shimano FC-T4010 Alivio, 48-36-26, Octalink, 9 Speed	Shimano T521, 48-36-26, Octalink, Hollow Tech, 10 Speed	Shimano T521, 48-36-26, Octalink, Hollow Tech, 10 Speed
Bottom Bracket	Shimano ES-300, Octalink	Shimano ES-300, Octalink	Shimano ES-300 Octalink	Shimano ES-300 Octalink
Seatpost	Whyte 20mm Offset, 30.9mm x 400mm, 6061 Alloy, With 2 Bolt Clamp	Whyte 20mm Offset, 30.9mm x 400mm, 6061 Alloy, With 2 Bolt Clamp	Whyte 20mm Offset, 30.9mm x 400mm, 6061 Alloy, 2 bolt clamp	Whyte 20mm Offset, 30.9mm x 400mm, 6061 Alloy, 2 bolt clamp
Seat	Whyte Custom, triple panel design	Whyte Custom Women's Fit, triple panel design	Whyte Custom, triple panel design	Whyte Custom Women's Fit, triple panel design
Bar	Whyte High Rise 30mm, 31.8mm, 620mm Wide	Whyte High Rise 30mm, 31.8mm, 620mm Wide	Whyte High Rise 30mm, 31.8mm, 620mm Wide	Whyte High Rise 30mm, 31.8mm, 620mm Wide
Stem	Whyte Custom, 80mm S, 90mm M & L, 100mm L	Whyte Custom, 70mm S, 80mm M, 90mm L	Whyte Custom, 80mm S, 90mm M & L	Whyte Custom, 70mm S, 80mm M, 90mm L
Grips	Whyte Custom Ergo Dual Density Lock-on's	Whyte Custom Ergo Dual Density Lock-on's	Whyte Custom Ergo Dual Density Lock-on's	Whyte Custom Ergo Dual Density Lock-on's
Front Brake	Shimano BR-M355, 160mm Rotor, Centre-Lock	Shimano BR-M355, 160mm Rotor, Centre-Lock	Shimano M447, 160mm Rotor	Shimano M447, 160mm Rotor
Rear Brake	Shimano BR-M355, 160mm Rotor, Centre-Lock	Shimano BR-M355, 160mm Rotor, Centre-Lock	Shimano M447, 160mm Rotor	Shimano M447, 160mm Rotor
Brake Levers	Shimano BL-M355	Shimano BR-M355	Shimano M445	Shimano M445
Pedals	Fibre reinforced Composite Platform	Fibre reinforced Composite Platform	Fibre reinforced Composite Platform	Fibre reinforced Composite Platform

C7 All Terrain e-Bike			Lightweight Classic Women's
Model	Coniston e-Bike	Coniston Women's e-Bike	Strawberry Hill
Colour	Matt Granite with Grey/Apple	Matt Granite with Magenta/Aqua	Matt Granite with Blood Red/Grey
Sizes Available	S,M,L	S,M,L	S,M,L
Frame	6061 Hydro Formed T6 Aluminium, Tapered Head Tube, Custom Drawn, Multi Butted with Custom Whyte Dropouts and Kick Stand mount	6061 Hydro Formed T6 Aluminium, Tapered Head Tube, Custom Drawn, Multi Butted with Custom Whyte Dropouts and Kick Stand mount	6061 Hydro Formed T6 Aluminium, Custom Drawn, Multi Butted with Custom Whyte Dropouts
Fork	SR Suntour NCX-D LO, 63mm travel, Alloy Tapered Steerer tube, Coil Spring and Hydro Lockout	SR Suntour NCX-D LO, 63mm travel, Alloy Tapered Steerer tube, Coil Spring and Hydro Lockout	Whyte Alloy, curved blade with Alloy Steerer
Rear Shock	N/A	N/A	N/A
Headset	FSA No. 57B Orbit ZS, Sealed Cartridge Bearing 1.5" Lower, 1 1.8" Caged Upper Bearings	FSA No. 57B Orbit ZS, Sealed Cartridge Bearing 1.5" Lower, 1 1.8" Caged Upper Bearings	FSA No.10, Semi Integrated, Caged Bearings
Rear Hub	Alloy, Cup & Cone, Double Seal, 32 Hole	Alloy, Cup & Cone, Double Seal, 32 Hole	Alloy, Cup & Cone, Double Seal, 32 Hole
Front Hub	Alloy, Cup & Cone, Double Seal, 32 Hole	Alloy, Cup & Cone, Double Seal, 32 Hole	Alloy, Cup & Cone, Double Seal, 32 Hole
Spokes	2.0mm, Black Sandvik Stainless Steel with Brass Nipples	2.0mm, Black Sandvik Stainless Steel with Brass Nipples	2.0mm, Silver Stainless with Brass Nipples
Rims	WTB SX-17 700c, 32 Hole, with eyelets	WTB SX-17 700c, 32 Hole, with eyelets	Whyte Double Walled Alloy, 700c, 32 Hole
Tyres	Vittoria Randonneur Trail 700 x 35c, with Double Shielding puncture protection	Vittoria Randonneur Trail 700 x 35c, with Double Shielding puncture protection	Maxxis Roamer, 700 x 42c High Air Volume, with Kevlar Puncture Guard
Shift Levers	Shimano SLX M675, 10 Speed	Shimano SLX M675, 10 Speed	Shimano Altus, 9 Speed
Front Derailleur	N/A	N/A	Shimano Altus, 9 Speed
Rear Derailleur	Shimano SLX M675, 10 Speed	Shimano SLX M675, 10 Speed	Shimano Acera RD-T3000, 9 Speed
Cassette	Shimano Deore HG-62, 11-34, 10 Speed	Shimano Deore HG-62, 11-34, 10 Speed	Shimano HG-30, 11-34, 9 Speed
Chain	Shimano STEP's E6090, e-Bike Specific, 10 Speed	Shimano STEP's E6090, e-Bike Specific, 10 Speed	KMC HG-53, 9 Speed
Crankset	Shimano STEP's E-6000, 44T With Double Sided Chain Gaurd, 10 Speed	Shimano STEP's E-6000, 44T With Double Sided Chain Gaurd, 10 Speed	Shimano M391 Acera, 48-36-26
Bottom Bracket	STEP's Drive Unit E-6000 with Speed Sensor and Magnet	STEP's Drive Unit E-6000 with Speed Sensor and Magnet	Square Taper
Seatpost	Whyte 20mm Offset, 30.9mm x 400mm, 6061 Alloy, 2 bolt clamp	Whyte 20mm Offset, 30.9mm x 400mm, 6061 Alloy, 2 bolt clamp	Whyte 20mm Offset, 30.9mm x 350mm, 6061 Alloy, With 2 Bolt Clamp
Seat	Whyte Custom, triple panel design	Whyte Custom, triple panel design	Whyte Custom Women's Fit, triple panel design
Bar	Whyte High Rise 30mm, 31.8mm, 620mm Wide	Whyte High Rise 30mm, 31.8mm, 620mm Wide	Whyte Swept Bar, 25.4mm, 600mm Wide, 45mm Sweep
Stem	Whyte Custom, 70mm S, 80mm M, 90mm L	Whyte Custom, 70mm S, 80mm M, 90mm L	Whyte Custom, High Rise, 20 Deg
Grips	Whyte Custom Ergo Dual Density Lock-on's	Whyte Custom Ergo Dual Density Lock-on's	GP1 Ergon, Swept Bar specific
Front Brake	Shimano M447, 160mm Rotor	Shimano M447, 160mm Rotor	Tektro Forged V Brake
Rear Brake	Shimano M447, 160mm Rotor	Shimano M447, 160mm Rotor	Tektro Forged V Brake
Brake Levers	Shimano M445	Shimano M445	Tektro V Brake Levers with Integrated Bell
Pedals	Fibre reinforced Composite Platform	Fibre reinforced Composite Platform	Alloy Body with Non Slip Grip



Specification details were correct at the time of printing. However, product changes may occur after this time. Please check model availability and full geometry details with your dealer prior to ordering.